

ROTHENBERGER

INDUSTRIAL

Quality since 1949



Soldering & Brazing
Welding
Industrial gases
Heating and Flaming
Camping
Garden & Household
Sanitary installation
Heating
Measure, test & inspect
Hand- and special tools















The customer guidance system that appears on our sales packaging

The ROTHENBERGER Industrial customer guidance system combines packaging, catalogue, "Lötfitel" and "Lötnavigator". These are precisely tailored to your needs and actively support your buying.

The clear colour coding of our gas appliances and solder makes it easy for you to put together your optimal working equipment.

The individual methods are characterised by the following colours or pictograms:

Soldering	Brazing	Gas welding
		
		
 Soldering	 Brazing	 Gas welding
		

Should you have any questions, please contact our Customer Service:
info-diy@rothenberger.com.

Only through your feedback can we succeed and become even better.

Safety advice for protection at work

- Safety glasses/welding shield, and depending on the technology used, light protection glasses
- Protective gloves
- Fireproof work pad
- Clean, protective working clothing, sturdy footwear
- Get specific fire-extinguishing agents, depending on the type of work: water-based or powder-based fire extinguishers, water, etc.
- After finishing soldering or welding always read and follow the manufacturer's operating manuals and safety instructions

Possible causes of poor results

- Wrong solder and / or flux
- Insufficient heat supply: solder doesn't flow or does not cover (formation of drops)
- heat too high: solder and / or flux burns or evaporates
- soldering gap too big: no capillary effect (the solder cannot close the gap)
- pipe ends and fittings have not been cleaned: oxide layer on the surface of the workpiece
- Defective electronic components after soldering: use temperature controlled Soldering Equipment (Elektroniklotstation)

This type of work must be carried out by a professional!

Never solder or weld tanks because of the high risk of explosion! Do not climb on tanks: high risk of asphyxiation or poisoning!

Pipe joints		surface joints		soldering of electronic components	
Soldering 🔥	Brazing 🔥	Gas welding 🔥🔥🔥	Soldering 🔥	Brazing 🔥	Gas welding 🔥🔥🔥
Cut the pipe with a stable pipe cutter or saw perpendicular to the tube axis		Cut the workpieces, deburr or chamfer the cut surfaces.		Cutting and stripping the cable ends. Preparing and equipping circuit boards.	
After the cut, carefully deburr the pipe ends inside (using the correct tool both inside and outside). After deburring, remove any metal filings and accurately size the pipe ends.		Mechanically clean the joints of any oxidation layer (Cleaning pad, etc.)		Degrease and remove rust from the workpiece weld seam area.	
Clean the soldering surfaces of the pipe ends and the fittings/expanded pipes with Rovlies (metal-free cleaning pad) or special cleaning brushes until bare metal.		Deburr, chamfer and fix the pipe ends.		Position and fix the components.	
Apply flux or soldering paste evenly on the pipe ends, in compliance with the legal guidelines. Brazing of drinking water pipes is permitted from 28 mm. It is necessary to use specially approved solders, fluxes and solder pastes. Wet the pipe and fitting/expanded pipes with flux while turning. Press together.		Assemble the pipe ends.		Apply flux or soldering paste evenly on the soldering surfaces, respectively wetting the soldering wire and fitting/expanded pipe with flux while turning slowly.	
Choice of an appropriate soldering torch.		Choice of an appropriate welding torch.		Choice of the appropriate electric soldering equipment.	
2. Procedures for soldering or welding					
Set the gas soldering machine so that there is a soft neutral flame with a clearly visible flame cone.		Set the gas soldering machine so that there is a soft neutral flame with a clearly visible flame cone.		Set the welding torch so that there is a neutral flame with a clearly visible flame cone.	
Heat the soldering points evenly.		Heat soldering points evenly until the soldering point glows cherry red.		Heat the welding seam until the workpieces become molten.	
Once the soldering paste gleams silver, turn the flame away and fill the soldering gap with solder.		Melt the solder in the flame, until the soldering gap is filled.		Under constant heat supply melt the welding wire in the weld pool.	
Let the soldering area cool down and remove the residues of flux with a damp cloth.		Let the soldering area slowly cool down.		Under constant heat supply melt the solder on the workpiece.	
Rinse pipelines.		Regularly perform leak tests.		Slowly let the soldering area cool down.	
Regularly perform leak tests.				Carefully and cautiously remove any flux residues, in order to avoid corrosion on electronic components, circuit boards, etc.	

The fundamentals of soldering technique

Working temperature:

this is the lowest surface temperature where, with the materials to be joined, the solder melts and wets and binds together the soldering area.

Soldering temperature:

is determined by the working temperature and is limited through the flux temperature, respectively the melting temperature of the solder.

Solder:

it's job is to bind together two similar or different work pieces. Thus, the composition / alloy of the solder must be appropriate to the workpieces. Depending on the purpose, soft or hard solders can be used.

Flux pastes:

these are fluxes which are added to solder components for specific uses. With these ready-made flux pastes the soldering areas are thinly coated and when the working temperature is reached, they are wetted all over with solder.

Flux-filled solders:

these can be soldering or brazing which are already filled with specific fluxes. They can be used without having to add additional fluxes.

Flux-coated solders:

these are brazing, where the soldering rod is coated with a specific flux. These solders can be used without additional fluxes.

Soldering devices:

this is the heat source. There are soldering devices with open flame (cartridge and gas powered soldering torches, etc.) and without flame (resistance brazing device, electric soldering iron, or soldering guns, etc.).

The small soldering manual.

Introduction to soldering and welding techniques

Soldering procedures can be divided into soldering and brazing, which features a different working temperature, which is higher in brazing. With these soldering techniques, metallic materials, which can be either the same or different, are solidly joined together firmly with heat using a soldering torches and supplying a non-ferrous metal alloy, solder and a specific flux.

Appropriately prepared material surfaces of the base materials are wetted and connected at their surface by the molten solder. Thus, the melting range of the solder is always lower than the melting points of the base materials. By desoldering, connected workpieces can, by supplying heat enough heat to melt the solder again, always be separated, and

can easily get their original shape back. Basically, soldering processes feature easy handling, short working times and relatively low levels of working, which result in no or only minor changes to the quality of the workpiece material itself. When welding, (oxyacetylene welding / arc welding / shielding gas welding), the metallic material of the base workpieces at the junction is melted by heating and forms a structural link with the molten additive (welding rod, rod electrode, wire electrode).

Professional soldering work guarantees optimal, durable joints. Soldering has been a proven technique for joining workpieces together for many centuries!

Perfect soldering equipment in just a few easy steps with the soldering navigator

Application/Connections

Pipe connections Power Fire	Heading installations (copper pipelines)	
	Drinking water installations (copper pipelines)	
	Gas pipelines (copper pipes for natural gas, butane and propane)	
Guttering, Tinsmith works Guttering soldering set	Copper	
	Titan, Zinc	
	Zinc	
Metallic joints Power Fire Roxy machine	Zinc	
	Stainless steel	
	Aluminium	
	non-ferrous metals (nickel, copper, brass, nickel alloy, zinc, tinplate)	
Electronic components Soldering station	PCBs	
	cables/conductors/wires (copper)	

Procedure

Soldering
Working temperature: < 450°C

- Low working temperature
- Easy handling
- Short working time
- Almost no change in the quality of the material
- Combination of different materials possible
- Suitable for soldering electronic joints
- Easy desoldering through heat supply

Brazing
Working temperature: > 450 – 1.100°C

- Combination of different materials possible
- Easy handling
- High mechanical and thermal stability of brazed joints
- Easy desoldering through heat supply

Gas welding
Working temperature: > 1250°C

- Very high working temperatures
- Very high mechanical and thermal strength of the welded joints
- Structural connection by fusion of the workpieces

Solder and Welding equipment

Miniset, RoPen, Pocket Torch, Micropen, Soldering iron, Guttering soldering set, Soldering station, Soldering gun, Soldering torch, Soldering torch with piezo, Hot Pack Set, RoFix Set

RoFire, RoFire Piezo, Power Fire, Propan soldering set, Airprop, Turbo soldering set

Roxy Kit Plus, Roxy Mapp, Roxy Universal, Roxy 400L, Three gas system

Industrial gases

RoFill, Minigas, C200, Multigas 300, Mapp Gas, Maxigas

Maxigas, Mapp Gas, Azetylen, Oxygen

Flux

For drinking water installations

Rosol 3

Not for Drinking water installations

Solder flux, Zinc soldering fluid, Salmiak stone

Brazing paste LP 5

Welding and brazing powder

Welding and brazing powder

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–



With ROTHENBERGER Industrial tools you decide for high quality products made by ROTHENBERGER.

Our current range of soldering, welding, plumbing, measuring and hand tools and our equipment for outdoor, camping and household stands out an always innovative technology, powerful processing and high user-friendliness.

For more than 60 years, our family-owned business from Kelkheim has been a market-leading producer of technically advanced pipe tools, machinery and environmental technology, with customers in Germany and all over the globe.

We not only want to satisfy our customers, we want them to be excited.

ROTHENBERGER
INDUSTRIAL

Quality since 1949

ROTHENBERGER Industrial GmbH
Sodener Straße 47
65779 Kelkheim | Germany
Tel. +49 (0) 6195 99 81 0
Fax +49 (0) 6195 99 81 79 10

Mail info-diy@rothenberger.com
www.rothenberger-industrial.com



The company

For more than 65 years, our family business based in Kelkheim, Germany, has been a leading manufacturer of technically sophisticated pipe tools, special equipment and environmental technology – going far beyond the borders of Germany. With more than 1,500 employees in over 50 group companies around the world, we produce and sell approximately 28 million ROTHENBERGER tools every year. Over 150 patents and trademarks, as well as the high level of in-house production ensures the quality of our products.

Based on the wide range of products required for the professional, ROTHENBERGER developed its user-friendly range of products for the professional handyman: ROTHENBERGER Industrial.

ROTHENBERGER Industrial GmbH was founded as a subsidiary of the ROTHENBERGER Group in 2007. Our young company stands for tradition, innovation and superior quality in the DIY/handyman market. This is reflected not only in the products but is also the basis of the corporate culture which defines ROTHENBERGER Industrial as a professional, competent and reliable partner.

With a presence in more than 3,500 professional and DIY stores, our products are available throughout Europe. Our target group of products offers a tailored portfolio of pipe and installation tools – ROTHENBERGER Industrial offers a balanced product assortment for the ambitious handyman. Our wide product range includes – in addition to traditional plumbing and hand tools – soldering and welding products, as well as outdoor, camping and metrology products. The continual maintenance of our product range, innovative packaging and attractively designed modules complement the professional performance program. The extensive distribution ensures the constant availability of our products. The close contact to our customers is one of the main reasons for our success.

Accordingly, our quality standards define our market presence with convenient packaging and well-presented displays in the market place.



The team

The ROTHENBERGER Industrial team consists of 35 employees, deployed across sales, purchasing, scheduling, shipping, storage, quality assurance and product management.

With our clear corporate structure, we live the seven values of the ROTHENBERGER group as part of the

large ROTHENBERGER family. This cohesion ensures a constant drive for motivation, passion, dedication and innovation creating the foundation of our business.

QUALITY, COMMITMENT and SERVICE are very important to us. Our team consists of highly trained, dedicated and skilled professionals.

Living the values

We see ourselves as a worldwide family that addresses new challenges with courage and entrepreneurial spirit, always clearly providing the demands and requirements of our products. We believe in quality, diligence, dynamism and respect and see these as

guidelines for our business activities. For the purposes of this corporate philosophy, we have identified seven ROTHENBERGER basic values that underpin our work.

1 Cohesion as a family

We are part of the worldwide ROTHENBERGER family.



2 Trust

Our corporate culture is built on mutual trust, based on honest and transparent communication, continuous processes and fair cooperation.



3 Responsibility

We acknowledge our responsibility for results, resources, and for our own choices. Our commitment and our passion for our jobs leads to high customer and employee satisfaction.



4 Efficiency

We work efficiently, because we keep things simple.



5 Quality

We are concerned about the quality of employees, products and processes. Therefore, we demonstrate excellence in everything we do.



6 Courage

We have the courage to innovate and change things, even if this means that we must step out of our comfort zone.



7 Entrepreneurship

In our work, we engage with an entrepreneurial spirit, we are action-oriented, make quick decisions and never give up. We are ready for the future!




Main reasons


for choosing ROTHENBERGER Industrial

- 1** Best prices and conditions for A grade quality products
- 2** Comprehensive price-performance relationship for distributors and end customers
- 3** Support for DIY stores through 26 ROTHENBERGER Industrial sales representatives in Germany and 4 in Austria
- 4** Quality! ROTHENBERGER Industrial ever uses high quality brass
- 5** ROTHENBERGER has been financially strong for over 65 years
- 6** Access to more product categories and innovations from the market leader
- 7** Access to ROTHENBERGER professional products for customer orders and any hire service
- 8** Supplier concentration for process cost optimisation
- 9** Colourful and informative self-service blister packaging
- 10** Proactive product streamlining
- 11** Professional and efficient modular development with consideration of capital commitment and transshipment
- 12** Significant participation of ROTHENBERGER Industrial project management in the standardisation of gas products on a European level

YOU'LL FIND ROTHENBERGER WHEREVER YOU ARE

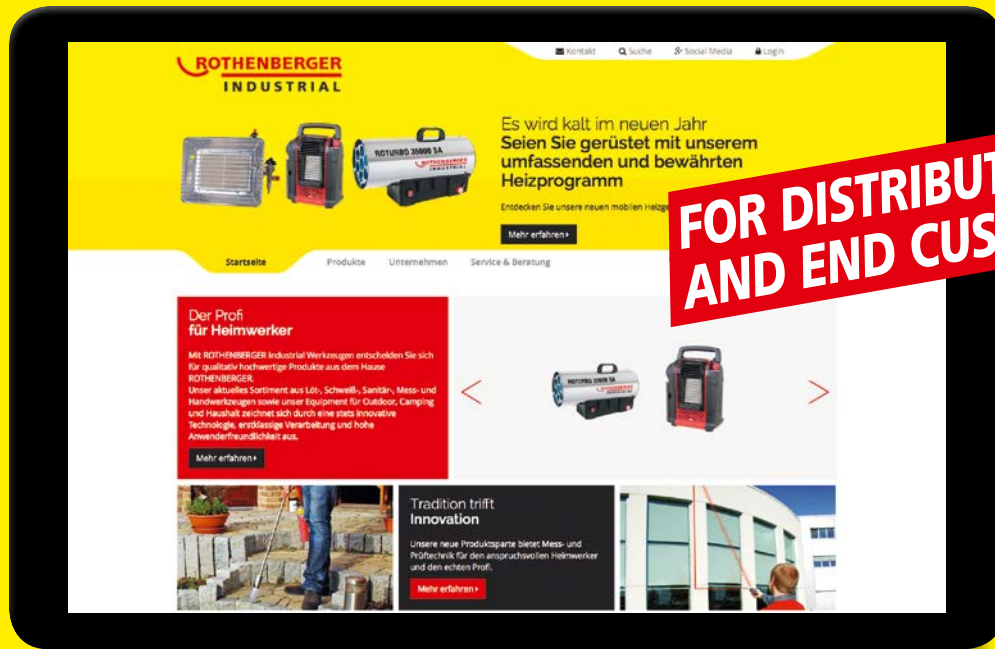

Visit our new,
responsive mobile website

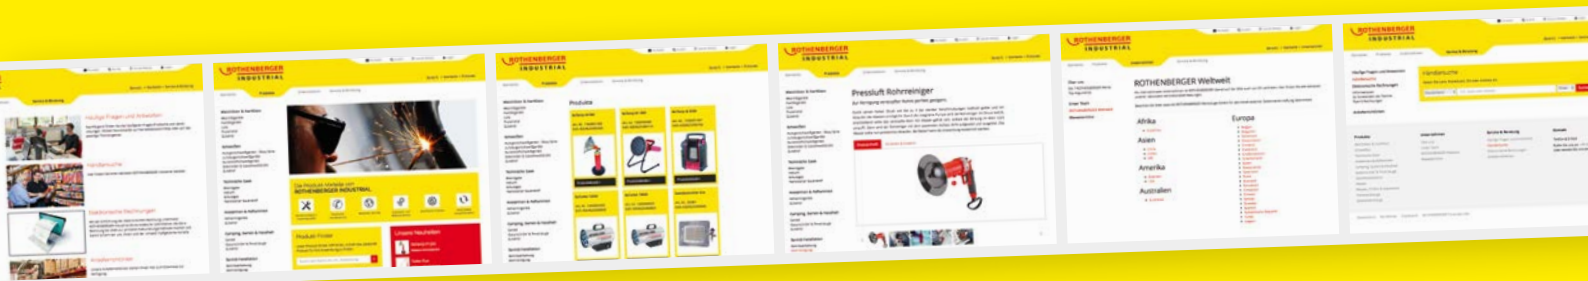

Learn all about our product portfolio (News, specifications etc.), latest events and other news about the company.

As an end user, locate your nearest ROTHENBERGER Industrial distributor.

As a distributor, our Login-area is available. Amongst other things, there is access to our image database and the archive of our Safety Data Sheets.

www.rothenberger-industrial.com

Contents

Soldering and brazing

Soldering torches	11
Brazing torches	18
Solder	20
Flux.	22
Accessories.	24

Welding

Gas welding torches.	29
Arc Welders´	34
Plastic Welders´	36
Electrodes & gas welding wire	38
Accessories.	40

Industrial gases

Fuel gas	49
Helium	52
Protective gas	52
Industrial oxygen	53

Heating and flaming

Flaming devices	55
Accessories.	58

Camping, Garden & Household

Devices.	61
Lighters	64
Accessories.	65

Sanitary installation

Tube machining	67
Pipe cleaning	78

Heating

Heaters.	83
Accessories.	87

Measure, test & inspect

Building and wood moisture meters	89
Distance measuring devices.	89
Inspection devices.	90
Temperature measuring devices	92

Hand- and special tools

Shears	94
Pliers	95
Special tools	97

POS

POS	98
---------------	----



Soldering and brazing

Soldering equipment, Brazing equipment, Solder, Flux and Accessories

01



Welding

Gas welding torches, Arc Welders', Plastic Welders', Electrodes & Gas welding wire, Accessories

02



Industrial gases

Fuel gas, Helium, Protective gas, Industrial oxygen

03



Heating and flaming

Flaming devices & Accessories

04



Camping, Garden & Household

Devices, Lighters, Accessories

05



Sanitary installation

Tube machining & Pipe cleaning

06



Heating

Heaters & Accessories

07



Measure, test & inspect

Building and wood moisture meters, Distance measuring devices, Inspection devices, Temperature measuring devices

08



Hand- and special tools

Shears, Pliers & Special tools

09



POS

POS

10

Soldering and brazing


The solder product family has traditionally been the largest in our history.

Alongside soldering and brazing devices, we include pyrography sets, solders, fluxes and accessories in the range.


Soldering is a process for joining metallic materials such as copper and copper alloys, nickel and iron materials.

The difference between soldering and brazing is in the so-called liquidus temperature (the temperature at which the solder is in liquid form).

If this temperature is below 450°C, it is soldering. If the temperature is above 450°C, it is brazing.



Soldering




Brazing

In the area of soldering, we have a range of gas and electro soldering devices. For brazing, we offer only gas soldering devices.

Both versions work only with the aid of a molten nonferrous metal alloy, a solder. It is important that the melting temperature of the solder is always below the melting temperatures of the connected base materials. These are wetted by the liquid solder, but not melted.

Check your choice of solder or ask about our "Lötfibel" or our "Lötnavigator" associated with the respective product labelling.

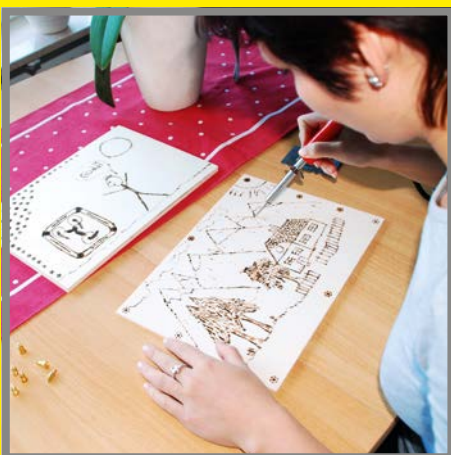



Soldering iron

Proven & reliable

Heating time: approximately 2 minutes | Softgrip plastic handle

Product coverage

- Electronics
- Electrical engineering
- Model construction
- Sheet metal processing
- Tiffany works
- Jumper wires
- Solder lugs
- Row soldering with faster soldering results

15 W

Art.-No. 1500000544 EAN 4004625380727



Delivery

- Plated Cu-tip straight / sharp
- VA heater element pipe with heat shield – Ø 4.0 mm
- Connection cable (rubber) – 1.5 m
- Equipment support

25 W

Art.-No. 35951 EAN 4004625359518



Delivery

- Plated Cu-tip straight / sharp
- VA heater element pipe with heat shield – Ø 4.0 mm
- Connection cable (rubber) – 1.5 m
- Equipment support

40 W

Art.-No. 35952 EAN 4004625359525



Delivery

- Nickel-plated copper tips straight / sharp and angled / flat
- VA heater element pipe with heat shield – Ø 5.0 mm
- Connection cable (rubber) – 1.5 m
- Equipment support

60 W

Art.-No. 35953 EAN 4004625359532



Delivery

- Nickel-plated copper tips straight / sharp and angled / flat
- VA heater element pipe with heat shield – Ø 5.8 mm
- Connection cable (rubber) – 1.5 m
- Equipment support

80 W

Art.-No. 35954 EAN 4004625359549



Delivery

- Nickel-plated copper tips straight / sharp and angled / flat
- VA heater element pipe with heat shield – Ø 7.0 mm
- Connection cable (rubber) – 1.5 m
- Equipment support

100 W

Art.-No. 35959 EAN 4004625359594



Delivery

- Nickel-plated copper tips straight / sharp and angled / flat
- VA heating element housing with heat shield – Ø 8.0 mm
- Connection cable (rubber) – 1.5 m
- Equipment support



Soldering iron set

The professional set for soldering

Soldering tip temperature: 300°C | Heating time: approximately 3–5 min |
Nominal voltage: 230–240 V

Product coverage

- Soldering of electrical and electronic components and circuit boards, boards, in model construction and radio / communications engineering
- Numerous metallic materials and alloys (mainly brass, copper, iron) are solderable

Product key features

- With retaining clips (third hand)
- Stand secure station with convenient storage
- Soldering accessory compartment

Performance: 30 W

Art.-No. 1500000041 EAN 4004625368596



Delivery

- 1x Soldering iron set
- 2x Soldering tips
- 1x Electronic solder – 20 g
- 1x Cleansing sponge



Professional soldering iron set

The perfect set for soldering in a plastic case

Rated voltage: 230 V/50 Hz | Soldering tip temperature: 25 W → 420°C,
80 W → 550°C | Heating time approximately 2 minutes

Product coverage

- Soldering in electronics, electrical engineering, models & sheet metal processing of thin sheets up to max. 0.8 mm
- Jumper wires up to 2.5 mm
- Connections to about Ø 2 mm
- Larger solder lugs

Product key features

- Includes Equipment storage
- Professional soldering accessories

Performance: 25 & 80 W

Art.-No. 35060 EAN 4004625022634



Delivery

- 1x Soldering iron 25 W
- 1x Soldering iron 80 W
- 1x Solder grease – 20 g
- 1x Braid – 2.5 mm x 1.6 m
- 1x Electronic solder – 100 g



Electronic soldering station

Ideal for soldering of electronic components

Heating time: approximately 1 min | Nominal voltage: Primary: 230 V~/50 Hz;
secondary: 12 V for soldering | max. Current consumption: 0.2 A | Soldering tip
temperature: approximately 150°C–450°C

Product coverage

- Soldering of printed circuit boards and electronic components
- Intricate soldering works in the field of handicrafts

Product key features

- The electronically monitored controlling of the working temperature enables professional work

Performance: 30 W/12 V

Art.-No. 35960 EAN 4004625359600



Delivery

- 1x Soldering station
- 1x Cleaning sponge
- 1x Piston holder



Brand

The ideal set for the painting and refining of wooden objects and furniture – Professional handling for a creative pastime

Rated voltage: 230–240 V; 50 Hz

Product coverage

- Writing and drawing on wood
- Delicate embellishments of wood surfaces (eg ornaments.)
- Writing & drawing on leather & cork

Product key features

- With the different burn points and branding irons many different patterns can be generated
- In plastic case

Performance: 30 W

Art.-No. 30991 EAN 4004625309919



Delivery

- 1x Alembic / bolt head
- 10x Burn tips
- 9x Branding iron
- 1x Template
- 1x Soldering tip
- 1x Knife insert
- 1x Jaws for knife use
- 1x Workstand



RoQuick

The soldering gun promises fast, accurate and reliable soldering

Soldering tip temperature: 510°C | Heating time: approximately 6 seconds | Rated voltage: 230–240 V

Product coverage

- Delicate soldering in model construction, electronics and electrical engineering
- Jumper wires up to 1.5 mm
- Small to medium solder lugs
- Small row soldering with faster soldering results
- Thin sheets up to 0.4 mm

Performance: 100 W

Art.-No. 35957 EAN 4004625359570



Delivery

- 1x Soldering gun
- 2x Cu solder grinder



RoPen 1300

The small, handy gas holder for delicate soldering work

Working temperature: approximately 450°C–600°C

Product coverage

- Delicate soldering work with open flame or catalytic soldering head with soldering tip (eg model construction or craft work.)
- Pyrotechnic works

Product key features

- Refillable
- Anywhere and quick to deploy

Art.-No. 35115 EAN 4004625015124





Micropen Set 1300

Gas soldering iron with catalyte soldering tip for various soldering works

Working temperature: approximately 450°C–600°C

Product coverage

- Delicate solder works
- Crafts
- Pyrographic works
- Model construction
- Styrofoam cutting
- Shrinking
- Plastic welding
- Tiffany works

Product key features

- Refillable

Art.-No. 35120 EAN 4004625010297



Delivery

- 1x Gas soldering iron with plastic tank and flame jet
- 1x Catalytic head
- 1x Needlepoint for delicate solder work
- 1x Chisel and slanted tip for normal electrical work
- 1x Knife for polystyrene cutting



Hot Pen Piezo Set

The professional gas soldering iron set can easily be used in any position, even upside down

Working temperature: approximately 450°C–600°C

Product coverage

- Delicate soldering work
- Crafts
- Pyrotechnik works
- Model construction
- Styrofoam cutting
- Hot air works
- Plastic welding
- Shrinking
- Deforming

Product key features

- Refillable
- Overhead work possible

10 section

Art.-No. 36060 EAN 4004625360606



Delivery

- 1x Gas soldering iron (with catalytic solder attachment including hot air nozzle and heat reflector.)
- 1x High quality plastic case
- 4x Solder attachments
- 1x Styrofoam cutter
- 1x Electronic solder – 20 g
- 1x Storage device
- 1x Cleaning sponge



Pocket Torch Piezo

Lighter and soldering torch in a single device – the ideal universal burner for home improvement, crafts, household and camping

Working temperature: approximately 450°C

Product coverage

- Delicate soldering works with concentrated open flame (eg Model construction.)
- Heat source
- Crafts
- Pyrographic works
- Household use as a lighter
- Camping

Product key features

- Refillable (with RoFill refill gas 35840)
- Piezo ignition
- Safety switches

Art.-No. 35130 EAN 4004625010334



01

02

03



RoFix Set 1800

The soldering torch complete set for beginners in a value pack

Working temperature: 650°C | Working time: 2.5 hours

Product coverage

- Soldering of copper pipes up to max. 28 mm
- Heating
- Thawing
- Melting

Product key features

- It has an integrated fine adjustment valve
- Integrated air supply regulation for precise flame adjustment

Art.-No. 35513 EAN 4004625355138



04

05

06



Hot Pack set

The perfect soldering set for beginners

Working temperature: 650°C | Working time: 2.5 hours

Product coverage

- Soldering of copper pipes up to max. 28 mm
- Heating
- Thawing
- Melting

Product key features

- Integrated fine regulating valve
- Integrated air supply regulation for precise flame adjustment

Art.-No. 18078 EAN 4004625180785



Delivery

- 1x Soldering torch
- 2x Multigas 300 cartridges

07

08

09

10



RoFire Mini 1450

Small, compact and handy soldering cartridge

Working temperature: 650°C | Working time: approximately 1.5 h |
Point burner: 14 mm

Product coverage

- Soldering for model construction
- Welding of round and square bars up to 3 mm thickness, thin-walled tubes up to max. Ø 10 mm

Product key features

- Small
- Handy

Art.-No. 35503 EAN 4004625355039



Delivery

- 1x Minigas cartridge
- 1x Fine adjustment valve
- 1x Combustion tube
- 1x Point burner – Ø 14 mm



Guttering soldering set

Ideal for working outdoors in all weathers

Flame temperature: approximately 2000°C | Working temperature: up to 800°C

Product coverage

- Soldered joints of gutters and downpipes made of copper, galvanised steel and titanium zinc sheets up to 1.5 mm thick
- Tinsmith works

Product key features

- The highly wind stable piston burner can also work on the roof when the wind blows and optimises the soldering process

Art.-No. 35498 EAN 4004625354988



Delivery

- 1x Handle with three-way valve and fixed pilot flame
- 1x High performance burner
- 1x Soldering iron holder
- 1x Windshield
- 1x Flat copper bit – 250 g
- 1x Hose assembly – 2x G 3/8" L – 2 m



RoFlame Premium

The high quality soldering torch for various soldering works

Working temperature: 650°C | Gas leading part made from brass

Product coverage

- Soldering
- Thawing
- Repair and service work in sanitary, heating, refrigeration and air conditioning sector
- Grill lighter

Product key features

- Housing made of sturdy plastic
- Safe and easy handling and accurate centering of the cartridge make working with this blowtorch easy

Art.-No. 35930 EAN 4004625359303





RoFlame Premium Piezo

The high quality soldering torch for soldering with piezo ignition
Working temperature: 650°C | Gas leading part made from brass

Product coverage

- Soldering
- Thawing
- Repair and service work in plumbing, heating, refrigeration and air conditioning sector
- Grill lighting

Product key features

- Housing made of sturdy plastic
- Safe and easy handling as well accurate centering of the cartridge make working with this blowtorch easy
- Comfortable piezo ignition

Art.-No. 35931 EAN 4004625359310



01

02

03



RoFlame Premium Set

The soldering torch set for immediate and sustainable use
Working temperature: 650°C | Gas leading part made from brass

Product coverage

- Soldering
- Thawing
- Repair and service work in sanitary, heating, refrigeration and air conditioning sector
- Grill lighter

Product key features

- Housing made of sturdy plastic
- Safe and easy handling and accurate centering of the cartridge make working with this blowtorch easy

With 4x C200 Supergas cartridge

Art.-No. 1000000981 EAN 4004625388440

Delivery

- 1x RoFlame Premium solder lamp
- 4x C200 Supergas cartridges



04

05

06



RoFlame Economy Set

The soldering torch set for immediate and sustainable use
Working temperature: 650°C | High quality burner

Product coverage

- Soldering
- Thawing
- Repair and service work in sanitary, heating, refrigeration and air conditioning sector
- Grill lighter

Product key features

- Housing made of sturdy plastic
- Safe and easy handling and accurate centering of the cartridge make working with this blowtorch easy

With 5x C200 Supergas cartridges

Art.-No. 1000000985 EAN 4004625388488

Delivery

- 1x RoFlame Economy solder lamps
- 5x C200 Supergas cartridges



07

08

09

With 4x C200 Supergas cartridge

Art.-No. 1000000982 EAN 4004625388457

Delivery

- 1x RoFlame Economy solder lamp
- 4x C200 Supergas cartridges



10



RoFire 1800

The proven high-performance soldering instrument for the handyman and professional

Working temperature: 710°C | Burner: 22 mm | Gas leading parts made from brass

Product coverage

- Brazing of copper pipes up to max. Ø 15 mm
- Soldering up to a max. Ø 22 mm
- Heating

Product key features

- Includes Support bracket
- Replaceable burner nozzle

Art.-No. 35501 EAN 4004625355015

Delivery

- 1x RoFire 1800
- 1x Multigas 300 cartridge



RoFire Piezo 1950

The proven high-performance soldering instrument for the handyman and professionals with piezo ignition system

Working temperature: 750°C | Burner: 22 mm | Gas leading parts made from brass

Product coverage

- Brazing of copper pipes up to max. Ø 15 mm
- Soldering up to a max. Ø 28 mm
- Heating

Product key features

- Includes Piezo ignition
- Includes Support bracket
- Replaceable burner nozzle

Art.-No. 35555 EAN 4004625355558

Delivery

- 1x RoFire Piezo 1950
- 1x Multigas 300 cartridge



Power Mapp

The professional high performance soldering instrument for fast and safe working

Working temperature: approximately 1250°C

Product coverage

- For soldering of pipes, sheets and moldings
- For brazing of pipes, sheets and moldings

Product key features

- Piezo ignition system
- Precise flame adjustment
- Constant gas pressure
- Optimal operation at low temperatures (about -20°C)
- Easy change to other fuel gases with connection 7/16" -EU thread (eg Multigas, Maxigas, Minigas)
- Faster and more economical work compared to conventional soldering equipment
- MAPP Gas – special gas mixture for very high working temperatures in single gas devices

Art.-No. 030813E EAN 4004625052907

Delivery

- 1x Power Mapp Burner
- 1x MAPP Gas cartridge





Propane soldering set 1800

Hose soldering device for beginners and advanced

Working temperature: 750°C | Burner unit made of brass

Product coverage

- Soldering up to Ø 28 mm
- Brazing up to Ø 22 mm

Product key features

- Easy
- Exactly adjustable

Art.-No. 30801 EAN 4004625308011



Delivery

- 1x Handle with fine control valve
- 1x Bending burner with union nut
- 1x Brazing torch – 22 mm
- 1x Hose assembly – G 3/8" L/10 x 1 L – 1.5 m



Airprop 2000

The high-performance turbo soldering torch is ideal because of its high and constant flame temperature for soldering and brazing

Working temperature: Approximately 800°C | Gas leading part made from brass

Product coverage

- For brazing (up to max. Ø 28 mm) of copper and steel pipes, sheets and fittings
- For soldering (up to max. Ø 54 mm) of copper and steel pipes, sheets and fittings
- Capillary soldering in sanitary and heating installations
- Warming

Product key features

- Adjustable via three-way valve with fixed pilot flame

Art.-No. 030950E EAN 4004625309506



Delivery

- 1x Airprop burner
- 1x Hose assembly – 2 m – on both sides G 3/4" L
- 1x Top ignitor
- 1x Burner tray
- 1x Key



Turbo soldering set 2000

The high-performance turbo-soldering instrument with universal equipment in a complete set

Flame temperature: 2000°C | Working temperature: 800°C | Gas leading parts made out of brass


Product coverage

- For brazing of copper pipes (up to max. Ø 28 mm), Steel pipes, sheets & fittings
- For soldering of copper pipes (up to max. Ø 54 mm), Steel pipes, sheets & fittings
- Capillary gap soldering in plumbing and heating equipment
- Warming

Product key features

- The universal complete equipment is professionally sorted into a case





Art.-No. 30900 EAN 4004625309001

















Delivery











- 1x Ergonomic safety handle with fixed pilot Flame – M 14 x 1 / G 3/8" L
- 1x Bending burner with safety cone seal
- 1x DVGW-approved LPG regulator 4 bar, 8 kg/h
- 1x DVGW-approved hose assemblies 2 m
- 1x Turbo torch Ø 28 mm
- 1x Point burner Ø 14 mm
- 1x Soldering torch Ø 22 mm
- 1x Soldering iron 250 g, Forged copper with set-up devices
- 1x Soldering attachment with 2x copper soldering tips
- 1x Safety ignitor
- 1x 50 mm coloured burner attachment
- 1x Burner support, 1x Hexagonal end wrench

Solder

Solder wire	Product name	Description	Art.-No.	Grams	Ø mm
	Fittings Solder 3	Quality solder to DIN EN ISO 9453 alloy S-Sn97Cu3	045253, 045253E	50	3
			045256, 045256E	100	
			045255, 045255E	250	
	Standard solder	Universal solder to DIN EN ISO 9453 alloy S-PB60Sn40	045272, 045272E	50	2
			045271, 045271E	100	
			045270, 045270E	250	
	Radio solder	Quality solder to DIN EN ISO 9453 alloy S-PB60Sn40	045262, 045262E	50	2
			045261, 045261E	100	
			045260, 045260E	250	
	Electronics solder	Quality solder to DIN EN ISO 9453 alloy S-Sn60 Pb40 activated without halogens non-corrosive all flux residues can remain on the joint without risk of corrosion	045282, 045282E	50	1,5
			045281, 045281E	100	
			045280, 045280E	250	

Rod solders	Product name	Description	Art.-No.	Electrodes	Ø/length mm
	Rilot 601	Nickel silver brazing rods	35601	5	2/333
			35600	20	
	Rilot 602	Brass welding and brazing rods	35602	5	2,5/333
	Rilot 603	Brass welding and brazing rods	35603	8	1,5/333
			35803	8	2/500
	Rilot 604	Aluminium brazing and welding rods	35604	5	3/333
	Rilot 605	Gas welding rods	35605	20	1,5/333
			31251	10	2/500
			31252	10	3/500
	Rilot 606	Silver brazing rod 45 %	35606	1	1,5/333
	Rilot 607	Brazing rods for copper joints	35607	5	2/333
			35707	25	2/333
			35807	25	2/500
	Rilot 608	Soldering rod for general installation work	35608	1	5/333
			045263E	5 (1 kg)	ca. 11/400
	Rilot 609	Special silver brazing rods 12 %	35609	2	1,5/333
			35809	4	1,5/500
	Rilot 610	Special silver solder 6 %	35817	5	2/330
			35818	8	2/500

Type	Application	Contains flux	Recommended additional flux
 230°C	Heating installations Drinking water installations	No	Rosol 3 fittings solder paste: Art.-No. 045225E – 250 g Art.-No. 045226E – 100 g Soldering flux: Art.-No. 045266E – 35 ml Art.-No. 100000242 – 120 ml
 183°C	Gutters, general metal work, telecommunications work Zinc, fine soldering Metallic joints Non-ferrous metals not suitable for stainless steel and aluminium	Yes	Soldering grease Art.-No. 035718E – 20 g soldering fluid Art.-No. 035719E – 24 ml
 183°C	Electronic components: PCBs, cables/conductors/wires	Yes	Soldering grease Art.-No. 035718E – 20 g soldering fluid Art.-No. 035719E – 24 ml
 183°C	Electronic components: PCBs, cables/conductors/wires	Yes	Soldering grease Art.-No. 035718E – 20 g soldering fluid Art.-No. 035719E – 24 ml

Type	Application	Contains flux	Recommended additional flux
 920°C	Metallic joints Iron, steel, copper, nickel, cast steel and non-ferrous metals	Yes	Welding and brazing powder Art.-No. 035611E – 50 g
 890°C	Metallic joints Iron, steel, copper, nickel, cast steel and non-ferrous metals	Yes	Welding and brazing powder Art.-No. 035611E – 50 g
 900°C	Metallic joints Iron, steel, copper, nickel, cast steel and non-ferrous metals	No	Welding and brazing powder Art.-No. 035611E – 50 g
 580°C	Metallic joints Aluminium brazing	Yes	–
 1250°C	Welding. For mechanical engineering boiler construction, pipe work and vehicle construction St34–St44, St37T–St44T, St35, St35.8 Boiler steel H I–H II	No	–
 670°C	Pipe installations gutters, general metal work with copper	Yes	–
 710°C	Pipe installations gutters, general metal work with copper	No	LP 5 brazing paste Art.-No. 035610E – 160 g
 236°C	Gutter, General metal work	No	Soldering flux Art.-No. 045266E – 35 ml Art.-No. 100000242 – 120 ml Soldering fluid "Zink" Art.-No. 045264 – 100 ml
 830°C	Pipe installations, Metallic joints, Iron, steel and cast steel, non-ferrous metals	Yes	–
 720°C	Gas installations	No	Brazing paste LP10 ATG: Art.-No. 040450 – 65 g



Fittings paste solder

Rosol 3

Product coverage

- For soldering of heating and drinking water pipes

Product key features

- Economical
- No soldering corrosion
- Barely visible flux residues
- No air inclusions in the solder joint
- Very good tin plating of the material surface
- Application of solder and fluxes in one operation

Contents: 100 g

Art.-No. 045226E EAN 4004625452264



Contents: 250 g

Art.-No. 045225E EAN 4004625452257



Soft solder flux

DIN EN 29454, 1, 3.1.1.C

Product coverage

- For soldering of copper tubes in the cold and hot water installation

Contents: 35 ml

Art.-No. 045266E EAN 4004625452660



Contents: 120 ml

Art.-No. 1000000242 EAN 4004625374795



Soldering fluid

DIN EN 29454, 1, 3.1.1.A

Product coverage

- General soldering of iron, steel, brass, copper, lead and tin
- For Tiffany works

Contents: 24 ml

Art.-No. 035719E EAN 4004625357194



Zinc soldering fluid

DIN EN 29454.1, 3.2.2.A

Product coverage

- Fluxes for soldering titanium zinc, galvanised steel and refined zinc

Contents: 100 ml

Art.-No. 45264 EAN 4004625452646





Flux paste

LP5

DIN EN 1045 – FH 10

Product coverage

- Brazing of ferrous metals
- For gas and water installation with copper pipes
- Used with Rolot 607

Contents: 160 g

Art.-No. 035610E EAN 4004625356104



Hard soldering paste

LP10 ATG

Product coverage

- Gas copper pipes
- Plumbing installations (drinking water, hot and cold water)
- Copper or brass terminals

Contents: 65 g

Art.-No. 40450 EAN 4004625404508



Solder flux

DIN EN 29454, 1, 3.1.1.C

Product coverage

- Soldering of tin, steel, copper and brass
- For tinning of copper wires

Contents: 20 g

Art.-No. 035718E EAN 4004625357187



Welding and brazing powder

HKM

Product coverage

- Brazing of brass, copper, red brass, nickel silver, bronze and iron
- Welding of cast iron

Contents: 50 g

Art.-No. 035611E EAN 4004625356111





Radio electronic set

The perfect accessory set in the electronics soldering area
Suitable for both DIY enthusiasts as well as the professional

Product coverage

- Electronic soldering

Product key features

- High-quality basic equipment for electronic soldering needs

Art.-No. 45150 EAN 4004625451502



Delivery

- 1x Salmiak stone
- 1x Braid
- 1x Electronic solder – 11 g
- 1x Radio solder – 10 g

Soft solder set

The perfect accessory set for soldering works in heating and sanitary applications

Product coverage

- Installation services in the sanitary sector – especially drinking water installation

Art.-No. 45227 EAN 4004625452271



Delivery

- 3x RoVlies cleaning pads
- 1x Flux paste – Rosol 3–100 g
- 1x Fitting solder 3–100 g

Tiffany craft set

The perfect accessory set in the Tiffany craft range

Product coverage

- Tiffany craft works

Art.-No. 45120 EAN 4004625451205



Delivery

- 1x Salmiak stone
- 1x Solder fluid – 24 ml
- 1x Standard solder – 20 g
- 1x Tiffany solder – 100 g



Brazing rings CU

Copper brazing containing phosphorus

Product coverage

- Pipe connections, copper lines and connections
- Capillary soldering for copper tube installation in sanitary and heating technology

Product key features

- True to size of the inner diameter of the lugged pipes and fittings
- Full soldering of the solder sleeves
- Particularly economical work due to precisely metered amount of solder

Ø 12 mm – 20 pieces

Art.-No. 040512E EAN 4004625047989



Ø 14 mm – 20 pieces

Art.-No. 040514E EAN 4004625047996



Ø 16 mm – 20 pieces

Art.-No. 040516E EAN 4004625048009



Ø 18 mm – 20 pieces

Art.-No. 040518E EAN 4004625048016



RoVlies

Metal-free cleaning fleece for all metals

Product coverage

- Soap-free cleaning of solder joints in copper pipes

Product key features

- No corrosion by metallic abrasion

5 pieces

Art.-No. 045267E EAN 4004625452677



Salmiak stone

Gentle and thorough cleaning

Product coverage

- To clean the tip of the soldering iron

65 x 45 x 20 mm

Art.-No. 035910E EAN 4004625359105



65 x 45 x 40 mm

Art.-No. 32355 EAN 4004625323557



Hot Pack burner

The power burner for gas cartridges with 7/16" -EU connection

Working temperature: 650°C | Brass burner

Product coverage

- For soldering of copper pipes up to Ø 28 mm
- Also suitable for heating, thawing and melting

Product key features

- With integrated fine adjustment valve and air supply regulation for precise flame adjustment

Art.-No. 520854E EAN 4004625046401





Propane handle

The ergonomic handle for hose soldering devices

Connection: M 14 x 1-G 3/8" L | Gas leading parts made from brass

Product coverage

- For gas soldering equipment with hose connection

Product key features

- Adjustable
- Three-way valve with fixed pilot flame
- Thermally insulated plastic handle

Art.-No. 030910E EAN 4004625309100



Copper soldering iron

Weight: 250 g | Brass gas burner

Product coverage


- Soldered joints of gutters and downpipes made of copper, galvanised steel and titanium zinc sheets up to 1.5 mm thick
- Tinsmith works
- Extension for all soldering equipment with propane handle M 14 x 1, G 3/8" L

Product key features

- Windbreak
- Storage support

Connection: M 14 x 1

Art.-No. 35499 EAN 4004625354995

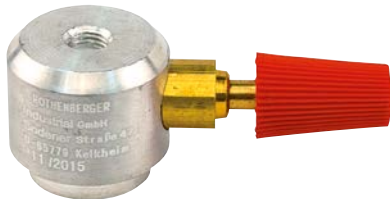

Gas regulating valve

Product coverage

- To regulate the flow of gas for welding and soldering equipment

Connection: 7/16" EU

Art.-No. 035723E EAN 4004625357231



Easy **Soldering**

Easy **Welding**


Easy **Making**

 **ROTHENBERGER**


INDUSTRIAL

**The professional answer
for the handyman**

Welding Joint welding and cladding with ROTHENBERGER Industrial arc and Gas welding equipment. Our range focuses its equipment range on the needs of the handyman and the professional user. Under the category of arc welding, there are both conventional AC welding transformers for welding rod electrodes as well as modern inverter welding machines, which facilitate their low weight mobile applications. Our MIG/MAG welding machines for welding different work pieces with wire electrodes under inert gas combines high quality welds in steel, stainless steel and aluminium materials with ease of use. For simple and inexpensive welding, a cored wire welding machine completes our range. A selection of different welding equipment for arc welding is available as required by the user. Sleeve welding units for welding of plastic pipes, such as PP, PB, PE or PVDF, in the installation section complement the ROTHENBERGER Industrial welding range. The devices have different power levels and the equipment is simple and safe to use. Suitable for use on construction sites, they allow the handyman as well as the professional easy and reliable installation of modern plastic pipes during the installation of plumbing and heating systems.



Gas welding

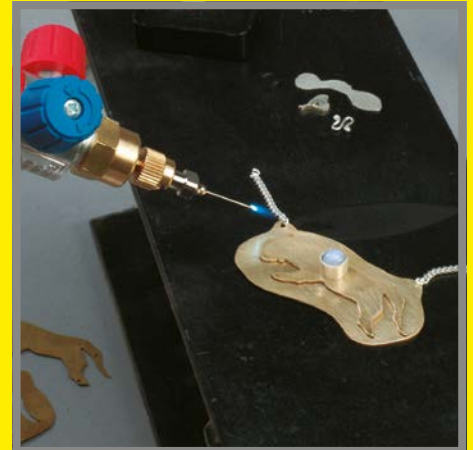



Roxy Kit Plus

The Roxy Kit Plus is a universal gas welding and brazing torch for an ambitious handyman and a true professional

The complete set comes with a gas and oxygen tank and is therefore ready to use. In addition to a high performance welding nozzle, the kit includes three micro-nozzles, which allow professional work in areas such as precision mechanics and model construction. The device is TÜV-certified and has all the required safety devices. Gas and oxygen return valves are already integrated.

Product coverage

- General welding work
- Brazing work
- Precision engineering
- Craft
- Model construction
- Optics
- Jewellery making
- Goldsmith works
- Bending works
- Extrusions
- Working area: 0.1 mm–2.5 mm Material strength

Product key features

- Ready to use

Includes Gas and oxygen bottles


Art.-No. 35740 EAN 4004625357408



Delivery

- 1x Maxigas 400
- 1x Oxygen disposable bottle – 110 bar
- 1x Burner key
- 1x Micro nozzle adapter
- 1x Nozzle mixing tube
- 1x Nylon protective goggles – A5
- 3x Micro-Nozzles – 0.4 mm, 0.5 mm and 0.6 mm
- 1x Gas regulator valve
- 1x Carrying frame
- 1x High performance welding handle
- 1x High performance welding nozzle – 0.9 mm
- 1x Security top ignitor
- 1x Oxygen pressure reducing valve with non-return function
- 1x Hose pack (gas and oxygen hose, gas hose with non-return function)
- 1x Assortment kit



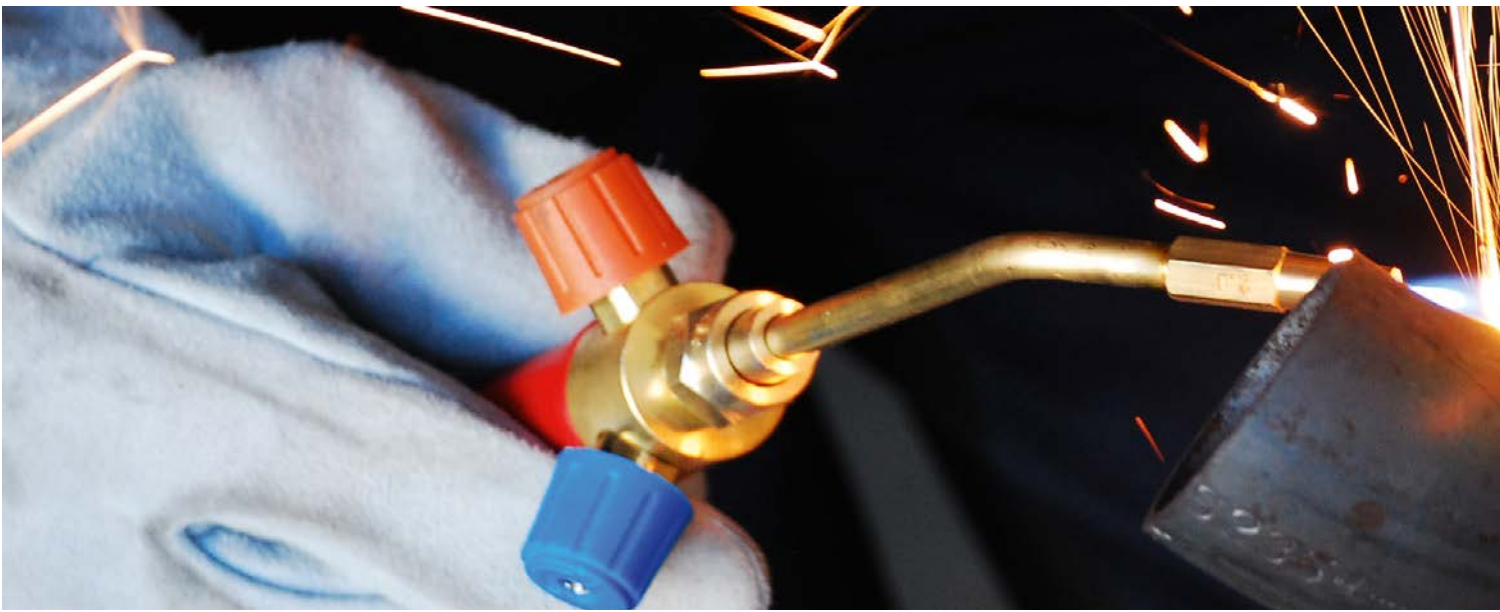

Roxy Mapp

The Roxy Mapp is a universal gas welding and brazing torch of the next generation for an ambitious handyman and a true professional

The complete set comes with a gas and oxygen tank and is therefore ready to use. In addition to two high performance welding nozzles, the kit includes three micro-nozzles, which allow professional work in areas such as precision mechanics and model construction. The device is TÜV-certified and has all the required safety devices. Gas and oxygen return valves are already integrated. The use of MAPP Gas enables high working temperatures for oxyacetylene welding.

Product coverage

- General welding work
- Brazing work
- Precision engineering
- Craft
- Model construction
- Optics
- Jewellery making
- Goldsmith works
- Bending works
- Extrusions
- Working area: 0.1 mm–2.5 mm Material strength

Product key features

- Ready to use
- High working temperatures by using MAPP Gas (ROTHENBERGER special gas mixture)

Includes Gas and oxygen bottles

Art.-No. 35760 EAN 4004625357606

Delivery

- 1x Mapp Gas – 750 ml
- 1x Oxygen single use bottle – 110 bar
- 1x Burner key
- 1x Micro nozzle adapter
- 1x Nozzle mixing tube
- 1x Nylon protector goggles – A5
- 3x Micro-Nozzles – 0.4 mm, 0.5 mm and 0.6 mm
- 1x Gas regulator valve
- 1x Carrying structure
- 1x High performance welding handle
- 2x High performance welding nozzle – 0.9 mm and 1.2 mm
- 1x Security top ignitor
- 1x Oxygen pressure reducing valve with non-return function
- 1x Hose pack (gas and oxygen hose, gas hose with non-return function)
- 1x Assortment kit





01

02

03

04

05

06

07

08

09

10



Roxy 400L

The Roxy 400L is a universal gas welding and brazing torch for an ambitious handyman and a true professional

The complete set comes with a gas and oxygen tank and is therefore ready to use. In addition to two high performance welding nozzles, the set includes three micro-nozzles, which allow professional work in areas such as precision mechanics and model construction. The equipment is TÜV-certified and has all the required safety devices. Gas and oxygen return valves are already integrated.

Product coverage

- General welding work
- Precision engineering
- Craft
- Model construction
- Optics
- Jewellery making
- Goldsmith's work
- Bending work
- Extrusions
- Work area: 0.1 mm–2.5 mm Material strength

Product key features

- Ready to use
- Refillable oxygen cylinder – 2 l, 200 bar
- Also suitable for use with MAPP Gas (ROTHENBERGER special gas mixture)

Includes gas and oxygen bottles

Art.-No. 35780 EAN 4004625357804



Delivery

- 1x Maxigas 400
- 1x Oxygen refillable bottle – 2 l, 200 bar
- 1x Burner key
- 1x Micro nozzle adapter
- 1x Nozzle mixing tube
- 1x Nylon protection goggles – A5
- 3x Micro-Nozzles – 0.4 mm, 0.5 mm and 0.7 mm
- 1x Gas regulating valve
- 1x Metal universal backplate
- 1x High performance welding handle
- 2x High performance welding nozzles – 1.2 mm and 1.5 mm
- 1x Security top ignitor
- 1x Oxygen pressure reducer with 2 manometers
- 1x Hose pack (gas and oxygen hose with non-return function)
- 1x Assortment kit



Roxy Universal

The Roxy Universal is a universal gas welding and brazing device for an ambitious handyman and a true professional

This kit is the basic unit, gas and oxygen tanks are not included. The device is intended for use with both disposable and reusable oxygen containers. As far as fuel gas in concerned, Maxigas as well as Mapp Gas can be used. In addition to three high performance welding nozzles, the kit includes three micro-nozzles that enable professional work in areas such as precision mechanics and model construction. The ergonomic handle with gas fine regulation valve for minimum gas consumption, and the hose package with return valve for oxygen and fuel gas guarantee optimum safety. The equipment is TÜV-certified and has all the required safety devices.

Product coverage

- General welding work
- Brazing
- Precision engineering
- Craft
- Model construction
- Optics
- Jewellery making
- Goldsmith's work
- Bending work
- Extrusions
- Warming
- Work area: 0.1 mm–2.5 mm Material strength

Product key features

- Universally applicable for oxygen disposable and reusable containers
- Universally applicable for ROTHENBERGER Gas cartridges 7/16" -EU connection (Maxigas, Multi Gas & Mapp Gas)


Basic device without gas and oxygen tank

Art.-No. 35050 EAN 4004625014301



Delivery

- 1x Burner key
- 1x Micro nozzle adapter
- 1x Nozzle mixing tube
- 1x Nylon protection goggles – A5
- 3x Micro-Nozzles – 0.4 mm, 0.5 mm and 0.7 mm
- 1x Gas regulator valve
- 1x Metal universal support frame with different mounting brackets
- 1x High performance welding handle
- 3x High performance welding nozzles – 1.2 mm, 1.5 mm and 2.0 mm
- 1x Security top ignitor
- 1x Oxygen pressure reducer with 2 manometers
- 1x Oxygen pressure reducing valve with non-return function for disposable containers
- 1x Hose pack (gas and oxygen hose with non-return function)
- 1x Assortment kit

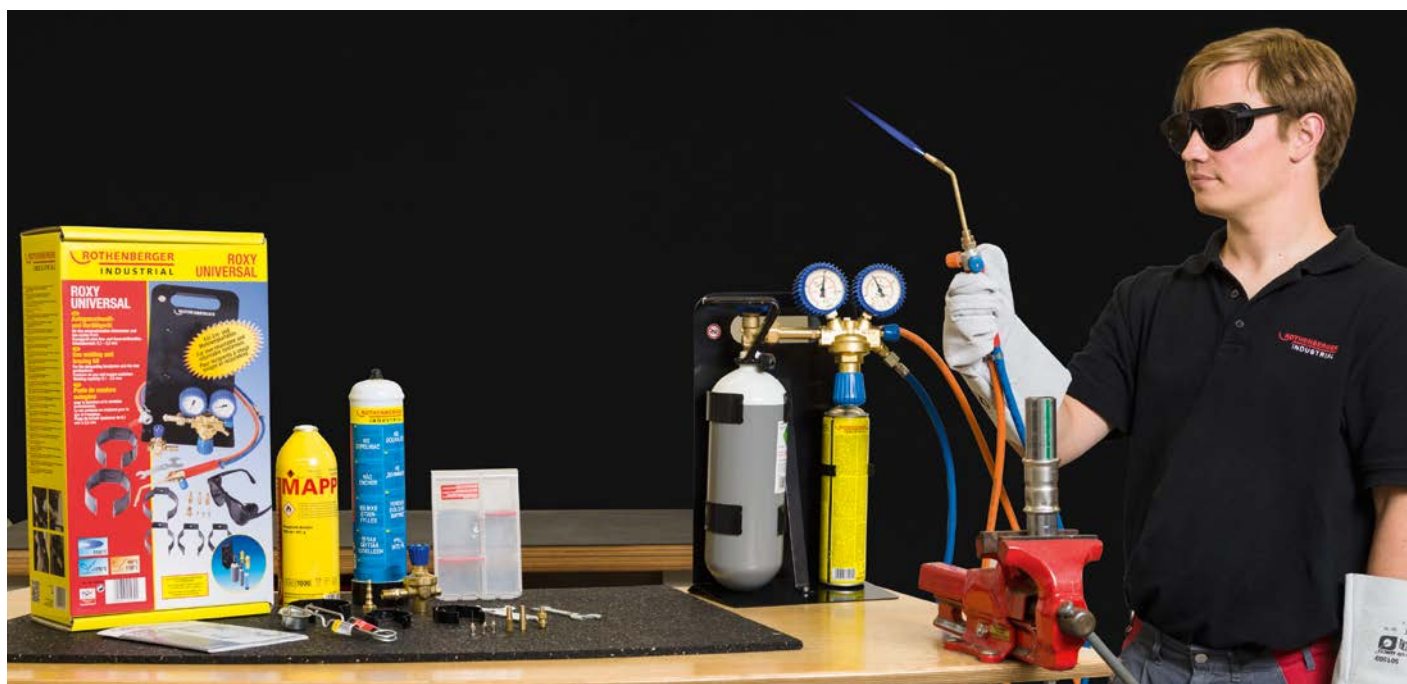



Three gas system AMS RE17 10/10

Gas welding, cutting and brazing torch for the handyman and professional
Universally applicable with mobile equipment trolley | Fully equipped with hose assembly, fittings and steel bottle set (filled) | Ready to use | mobile

Product coverage

- Welding
- Flame cutting
- Brazing
- Car repairs
- Body work
- Plumbing, heating and air conditioning systems
- Metal & ironwork in stationary and mobile use

Product key features

- Ready to use
- Processing of iron, steel, sheet metal, pipes, fittings and nonferrous metals
With high performance and low consumption
- Secure attachment of steel cylinders by a retaining bracket
- Alternatively Maxigas or Mapp gas can replace acetylene used

Welding range: 0.5 mm – 9 mm |

Cutting: 3.0 mm – 25 mm

Art.-No. 35798 EAN 4004625357989



Delivery

- 1x 10 l Filled acetylene cylinder – Property bottle of the buyer – TÜV-tested
- 1x 10 l Filled oxygen bottle – Property bottle of the buyer – TÜV-tested
- 1x Maxigas 400–600 ml
- 1x Single telescopic trolley
- 1x Acetylene pressure reducer with 2 manometers
- 1x Oxygen pressure reducer with 2 manometers
- 1x Gas fine adjustment valve for combustible gas cartridges 7/16" EU (Maxigas Multigas, MAPP Gas)
- 1x Hose adapter for gas cartridges 7/16" EU – G 3/8" L
- 1x Twin hose A / S – 5 m
- 1x Steel case RE17, mounted
- 1x Welding handle RE17
- 1x 5 Welding torches 0.5 mm–9.0 mm
- 1x Wing lever cutting insert with cutting nozzle 3 mm–25 mm
- 1x Heating nozzle 3 mm–100 mm
- 1x Safety heated ignitor
- 1x Flints
- 1x Burner key
- 1x Nozzle cleaner – 10 pcs.





RoWeldo 160

Portable electrode welder – single phase with a fan and thermal protection

Rated voltage: 230 V / 50 Hz | Welding current control range: 55–160 A | Power fuse: 16 A | Open circuit voltage: 48 V | Insulation class: H | Protection class: IP21S | Average operating time about 25 % | Infinite adjustment of the welding current | Weight: ca. 6.2 kg

Product coverage


- For the welding of rod electrodes: 1.5 mm–max. 3.25 mm

Product key features

- With fan and thermal protection

Welding current control range: 55–160 A

Art.-No. 36015 EAN 4004625360156



Delivery

- 1x Connection cable – 230 V
- 1x Electrode holder, mounted
- 1x Ground terminal, mounted
- 1x Welding shield complete with protective and prescription glass
- 1x Chipping hammer
- 1x Wire brush, welding cables firmly mounted



RoCored Welder 180 Combi

Portable electrode cored wire welding machine

Rated voltage: 230 V / 50 Hz | Insulation class: H | Protection class: IP21S | Weight: ca. 6.2 kg

Product coverage


- For the welding of cored wire

Product key features

- Copper welding nozzle
- Adjustable welding wire feed
- Combi device

Welding current: 180 A

Art.-No. 1500002187 EAN 4004625406069



Delivery

- 1x Cored wire welder with strap
- 1x Ground cable with electrode holder
- 1x Welding screen
- 1x Slag brush with hammer
- 1x Welding gun



RoCored Welder 90

Portable cored wire welding machine without gas protection

Rated voltage: 230 V / 50 Hz | Suitable for 0.6 mm–0.9 mm cored wire

Product coverage

- For the welding of cored wire
- Without addition of protective gas

Product key features

- With connection package consisting of burner unit and ground cable with earthing terminal
- Adjustable welding current in two switching stages (45 A / 90 A)

Welding current control range: 45–90 A

Art.-No. 1500000542 EAN 4004625380710



Delivery

- 1x Cored wire welder
- 1x Ground cable
- 1x Ground terminal



01

02

03

04



05

RoWin 140

Powerful electrode welding machine with advanced inverter technology

Rated voltage: 230 V / 50 Hz | Suitable for TIG welding | Maximum weldable electrode: 1.6–3.2 mm | Insulation class: H | Protection class: IP21S | Weight: 5 kg

Product coverage

- For electrode welding
- Assembly

Product key features

- Infinitely adjustable

Welding current control range: 20–140 A

Art.-No. 1500002184 EAN 4004625406038



Delivery

- 1x Electrode welder with strap
- 1x Ground cable with electrode holder
- 1x Welding screen
- 1x Slag brush with hammer

06

07



RoWin 80

Powerful electrode welding machine with advanced inverter technology

Rated voltage: 230 V / 50 Hz | Maximum weldable electrode 1.6–2.6 mm | Insulation class: H | Protection class: IP21S | Weight: 2.5 kg

Product coverage

- For electrode welding
- Assembly

Product key features

- Infinitely adjustable

Welding current control range: 10–80 A

Art.-No. 1500002185 EAN 4004625406045



Delivery

- 1x Electrode welder with strap
- 1x Ground cable with electrode holder
- 1x Welding screen
- 1x Slag brush with hammer

08

09

10



RoWin 160 Plus

Powerful electrode welding machine with advanced inverter technology

Rated voltage: 230 V / 50 Hz | Suitable for TIG welding | Maximum weldable electrode: 1.6–4.0 mm | Insulation class: H | Protection class: IP21S | Weight: 4.5 kg

Product coverage

- For electrode welding
- Assembly

Product key features

- Infinitely adjustable
- Digital display
- Suitable for steel, stainless steel, cast iron

Welding current control range: 20–160 A

Art.-No. 1500002186 EAN 4004625406052



Delivery

- 1x Electrode welder with strap
- 1x Ground cable with electrode holder
- 1x Welding screen
- 1x Slag brush with hammer



RoWin 160

Powerful electrode welding machine with advanced inverter technology

Rated voltage: 230 V / 50 Hz | Suitable for TIG welding | Maximum weldable electrode: 1.6–4.0 mm | Insulation class: H | Protection class: IP21S | Weight: 4.5 kg

Product coverage

- For electrode welding
- Assembly

Product key features

- Infinitely adjustable
- Suitable for steel, stainless steel, cast iron

Welding current control range: 20–160 A

Art.-No. 1500002189 EAN 4004625406076



Delivery

- 1x Electrode welder with strap
- 1x Ground cable with electrode holder
- 1x Welding screen
- 1x Slag brush with hammer

Plastic Welders



Socket welder CR-RJQ-40

For simple welding of PP, PB, PE and PVDF plastic pipes and sleeves

Working temperature: 260°C ± 5 % | Rated voltage: 220/230 V | Frequency: 50/60 Hz | Weight: 1.6 kg | Dimensions: 340 x 122 x 50 mm

Product coverage

- Welding of PP, PB, PE and PVDF plastic pipes and closures

Product key features

- Thermostatically constant controlled

Performance: 600/650 Watt

Art.-No. 36051 EAN 4004625360514



Delivery

- 4x Nonstick heating mandrels and sleeves (20 mm, 25 mm, 32 mm, 40 mm)
- 1x Solid carrying case made of metal
- 1x Stable table stand
- 1x Retaining bolts
- 1x Allen key
- 1x Nonstick heater
- 1x VDE-checked construction cable H05RN-F 3G 0.7 mm



Socket welder CR-RJQ-63

For simple welding of PP, PB, PE and PVDF plastic pipes and sleeves

Working temperature: 260°C ± 5 % | Rated voltage: 220/230 V |
Frequency: 50/60 Hz | Weight: 1.68 kg | Dimensions: 370 x 135 x 50 mm

Product coverage

- Welding of PP, PB, PE and PVDF plastic pipes and closures

Product key features

- Thermostatically constant controlled
- Temperature setting with digital display

Performance: 800 / 870 Watt

Art.-No. 36052 EAN 4004625360521



Delivery

- 6x Nonstick heating mandrels and sleeves (20 mm, 25 mm, 32 mm, 40 mm, 50 mm, 63 mm)
- 1x Solid carrying case made of metal
- 1x Stable table stand
- 1x Retaining bolts
- 1x Allen key
- 1x Table vice for horizontal and vertical use
- 1x Nonstick heater
- 1x VDE-checked construction cable H07RN-F 1.5 mm



Socket welder CR-ZRJQ-63T

For simple welding of PP, PB, PE and PVDF plastic pipes and sleeves

Working temperature: 200°C–279°C ± 5 % | Rated voltage: 220/230 V |
Frequency: 50/60 Hz | Weight: 1.8 kg | Dimensions: 370 x 135 x 50 mm

Product coverage

- Welding of PP, PB, PE and PVDF plastic pipes and closures

Product key features

- Thermostatically constant controlled
- Temperature setting with digital display

Performance: 800 / 870 Watt

Art.-No. 36062 EAN 4004625360620



Delivery

- 6x Nonstick heating mandrels and sleeves (20 mm, 25 mm, 32 mm, 40 mm, 50 mm, 83 mm)
- 1x Solid carrying case made of metal
- 1x Stable table stand
- 1x Retaining bolts
- 1x Allen key
- 1x Table vice for horizontal and vertical use
- 1x Nonstick heater
- 1x VDE-checked construction cable H07RN-F 3G 1.5 mm



Socket welder CR-ZRJQ-110T

For simple welding of PP, PB, PE and PVDF plastic pipes and sleeves

Working temperature: 200°C–279°C ± 5 % | Rated voltage: 220/230 V |
Frequency: 50/60 Hz | Weight: 2.0 kg | Dimensions: 380 x 155 x 60 mm

Product coverage

- Welding of PP, PB, PE and PVDF plastic pipes and closures

Product key features

- Thermostatically constant controlled
- Temperature setting with digital display

Performance: 1200 / 1300 Watt

Art.-No. 36063 EAN 4004625360637




Delivery

- 3x Nonstick heating mandrels and sleeves (75 mm, 90 mm, 110 mm)
- 1x Solid carrying case made of metal
- 1x Stable table stand
- 1x Retaining bolts
- 1x Allen key
- 1x Table vice for horizontal and vertical use
- 1x Nonstick heater
- 1x VDE-checked construction cable H07RN-F 3G 1.5 mm

Electrodes & gas welding wire

Electrodes	Rutile steel electrodes	Stainless steel electrodes	Aluminium electrodes	NiCu electrodes	Art.-No.	Pieces	Length / Ø mm
	Roweld 708				35708	10	300 / 1.5
	Roweld 709				35709	10	300 / 2
	Roweld 709				31221	80	300 / 2
	Roweld 709				31222	195	350 / 2
	Roweld 710				35710	8	350 / 2.5
	Roweld 710				31223	50	350 / 2.5
	Roweld 710				31224	125	350 / 2.5
	Roweld 711				35711	5	350 / 3.25
	Roweld 711				31226	87	350 / 3.25
	Roweld 711				31225	35	350 / 3.25
	Roweld 712				35704	5	350 / 4
		Roweld V2A			31243	10	300 / 2
			Roweld AL		35702	10	350 / 2.5
				Roweld NiCu	35730	10	300 / 2.5

Wire electrodes	Copper plated steel welding wire	Stainless steel welding wire	Aluminiumwelding wire	Flux-cored welding wire for unalloyed and low-alloyed steel	Art.-No.	Weight / kg	Ø mm
	●				31231	1	0.6
	●				31232	1	0.8
	●				31233	5	0.6
	●				31234	5	0.8
	●				31239	15	0.8
	●				31240	15	1
		●			31235	1	0.8
			●		31236	0,5	1
				●	31244	0,9	0.9

Current in Amps	Application	Welding positions	Material thickness	Sparking voltage	Tensile strength N/mm ²	Expansion %
30–50	Arc welding, assembly or repair of iron and low-alloy steel	all	1–3 mm	45 V	440–520	24
40–70			1.5–4 mm			
			1.5–4 mm			
			1.5–4 mm			
60–100			2–6 mm			
			2–6 mm			
			2–6 mm			
85–140			3–7 mm			
			3–7 mm			
			3–7 mm			
100–160		4–10 mm				
50–70	Arc welding, assembly or repair of stainless steel parts: Chemical and petrochemical applications, marine applications, heat exchangers and installations	all except vertical downwards	>2 mm	55 V	–	–
50–80	Arc welding, assembly or repair of aluminium parts: Motor blocks, cylinder heads, canisters, tanks, containers, skips etc.	PA, PB, PF	>2 mm		–	–
50–90	Arc welding parts made of cast iron or cast steel, assembly/repair of motor blocks, machine parts, transmissions, pumps, valves and armatures etc.	PA, PB, PF	>2 mm		–	–

Gas supply	Application
CO ₂ and Ar-CO ₂	Iron / steel use with a MIG/MAG welder
Argon/ Helium	Stainless steel use with a MIG/MAG welder
	Aluminium use with a MIG/MAG welder
no gas	Iron / Steel use with a MIG/MAG welder



Electrode holder

Clamping to the right, left and to the front is possible

Product coverage

- Suitable for all rod electrodes

200 A / M 8 | up to 2.4 mm

Art.-No. 530209 EAN 4004625302095



300 A / M 8 | up to 3.2 mm

Art.-No. 530210 EAN 4004625302101



Earth terminal

Zinc plated | For M6 cable connections

150 A / M 6

Art.-No. 530211 EAN 4004625302118



200 A / M 8

Art.-No. 530212 EAN 4004625302125



M8 gas nozzle

Gas nozzle for protective gas burners type 10 with M8 thread

Material: Copper, nickel | Screwable | Thread: M 8

Product coverage

- Supply of protective gas in MIG / MAG welding equipment

Cylindrical (2 pieces)

Art.-No. 530220 EAN 4004625302200



Conical (2 pieces)

Art.-No. 530221 EAN 4004625026748



Cylindrical and Conical set (1 of each)

Art.-No. 530226 EAN 4004625302262





15 plus gas nozzle

Gas nozzle for protective gas burners type 15 with M10 thread
Material: Copper, nickel | For Ø 12 mm shafts | Thread: M 10 | pluggable

Product coverage

- Supply of protective gas in MIG / MAG welding equipment

Cylindrical (2 pieces)

Art.-No. 530222 EAN 4004625026755



Conical (2 pieces)

Art.-No. 530223 EAN 4004625302231



Cylindrical and Conical set (1 of each)

Art.-No. 530227 EAN 4004625302279



Point gas nozzle

Gas nozzle for protective gas burners type 15 with M10 thread
Length: 60 mm | Ø Nozzle: 16 mm | Material: Copper, nickel | For Ø 12 mm shafts | Thread: M 10 | Pluggable

Product coverage

- Supply of protective gas in MIG / MAG welding equipment

Cylindrical (2 pieces)

Art.-No. 530224 EAN 4004625302248



Contact tip

Contact tip for wire electrode
Material: bare electrolytic copper

Product coverage

- For MIG / MAG equipment

Thread: M5 | 0.6 x 18 mm

Art.-No. 530230 EAN 4004625302309



Delivery

- 5x Power nozzles

Thread: M5 | 0.8 x 18 mm

Art.-No. 530231 EAN 4004625302316



Delivery

- 5x Power nozzles

Thread: M6 | 0.6 x 25 mm

Art.-No. 530232 EAN 4004625302323



Delivery

- 5x Power nozzles

Thread: M6 | 0.8 x 25 mm

Art.-No. 530233 EAN 4004625302330



Delivery

- 5x Power nozzles

Thread: M6 | 1.0 x 25 mm

Art.-No. 530234 EAN 4004625302347



Delivery

- 5x Power nozzles



Micro burner and welding nozzle assortment

Nozzles accessories set for the Roxy series gas welding equipment

Art.-No. 35420 EAN 4004625354209



Delivery

- 3x High performance welding nozzles: 1.2 mm – 1.5 mm – 2.0 mm
- 3x Micro nozzles: 0.4 mm – 0.5 mm – 0.7 mm



Angle magnet

For the fixing and aligning of flat and round weldments

Fusing range: 30°, 45°, 60°, 75°, 90°

100 x 65 mm

Art.-No. 530213 EAN 4004625302132



120 x 90 mm

Art.-No. 530214 EAN 4004625302149



Wire brush

The perfect cleaner for coarse matters

Product coverage

- Cleaning of castings
- Cleaning of metal surfaces

Product key features

- Handle made of high quality wood
- Stable metal bristles

3 rows

Art.-No. 561351E EAN 4004625027677



4 rows

Art.-No. 561352E EAN 4004625027684



Flame retardant mat

Continuous temperature resistance 900°C (short term up to 1100°C) | Especially suited for temperatures above 800°C with liquid slag | Melting point in direct flame impingement 840°C

Product coverage

- Provides protection of up to 1000°C of soldering flame and welding heat for ground surfaces (floors, ceilings, walls, wall coverings, cables, carpets and other high fire risk materials)

Product key features

- Very flexible / Good formability
- Long service life
- High sliding and cut resistance

25 x 25 x 0.4 cm

Art.-No. 031051E EAN 4004625006931





01

02

03

04

05



Safety top lighter

The safe gas lighter for all soldering and welding equipment

The fuel gas is ignited safely in the pan by direct action of the spark |
Flint replaceable

Product coverage

- Safe gas ignition

Product key features

- Gas/air mixture collects in the pot, so can be fired safely even in windy conditions
- Durable flint

Art.-No. 032093E EAN 4004625320938



06

07



Protective gas nozzle cleaner

The perfect complement for the cleaning of protective gas nozzles

Includes 3x Cleaning knives

Art.-No. 530219 EAN 4004625302194



09

10



Pressure reducer with 2 manometers

Pressure flow can be adjusted manually with 2 manometers | Contents gauge: 0–315 bar | With shut-off valve and hose connector | W 21.8 x 1, – G 1/4" R

Product coverage

- For protective gas equipment (CO₂, argon and carbon acid)

With 2 manometer

Art.-No. 530217 EAN 4004625302170



Pressure reducer

Single-stage | Up to 130 bar test pressure with safety gauge according to EN 562 | Contents gauge adjustable from 0 to 6 bar | Input: M 10 x 1 right | Output: G 1/4" R with hose nozzle

Product coverage

- For protective gas disposable bottles

With manometer

Art.-No. 530218 EAN 4004625302187



Oxygen pressure reducer

Bottle contents: 110 bar | Input: M 10 x 1 | Output: G 1/4" R

Product coverage

- Fits oxygen disposable bottles with 10 x 1 thread

Product key features

- Infinitely adjustable

Includes Flashback valve

Art.-No. 1500000465 EAN 4004625379240



Oxygen pressure reducer

Bottle contents: 200 bar | Working pressure: 0–10 bar | Input: G 3/4" R | Output: G 1/4" R

Product coverage

- Suitable for oxygen-returnable bottles: Roxy 400L, Roxy Universal and Standard three gas equipment

Product key features

- Includes Flashback valve

With 2 manometer

Art.-No. 35634 EAN 4004625001240



Hose package Roxy Kit / Roxy Mapp

The hose pack for autogenous welding devices in the Roxy Series

With integrated gas non-return function | Oxygen pressure reducer (integrated non-return function) | Includes Grip with regulating valves (connection: 14 x 1) | Oxygen hose connection G 1/4" R | Gas hose connection M 10 x 1

Product coverage

- For autogenous welding equipment from the Roxy Series with oxygen disposable bottles

Hose length: 1.5 m each

Art.-No. 33300 EAN 4004625333006





Hose package Roxy 400L / Roxy Universal

The hose pack for autogenous welding devices in the Roxy Series

With integrated oxygen and gas non-return function | Includes Grip with regulating valves (connection: 14 x 1) | Oxygen hose connection G 1/4" R | Gas hose connection M 10 x 1

Product coverage

- For autogenous welding equipment from the Roxy Series with oxygen re-useable bottles

Hose length: 1.5 m each

Art.-No. 33301 EAN 4004625333013



01

02

03

04

05

06

07

08

09

10



Welding protection goggles

To protect the conjunctiva from burns

Plastic frame with adjustable temples and fold-out side protection | Interchangeable protective glasses | Robust safety glasses with traditional visors | Glass Size: Ø 50 mm

Product coverage

- Brazing and soldering
- Autogenous welding
- Flame cutting

Product key features

- Adjustable length and tilt strap ensures a perfect fit

With DIN 5 Glasses

Art.-No. 035621E EAN 4004625356210



Full protection eyewear

To protect the conjunctiva from burns

Large-scale protection of the eye area due to flexible plastic housing (PVC) | Eyeglass frames made from polyamide | Resizing possible with the adjustable elastic band | Ventilation slots prevent fogging of the safety glasses | Light protection glasses are foldable and interchangeable | Transparent protective glasses | Suitable for people who wear glasses | CE approved according to EN 166/169 | Glass Size: Ø 50 mm

Product coverage

- Brazing and soldering
- Autogenous welding
- Flame cutting

With DIN 5 Glasses

Art.-No. 530207 EAN 4004625302071



Screw ring goggles

To protect the conjunctiva from burns

Stroof glasses with screw cover | Housing made from metal, with elastic band and side air vents | Full protection for the eye area | Interchangeable protective glasses | CE approved according to EN 166/169 | Glass Size: Ø 50 mm | Weight: approximately 80 g

Product coverage

- Brazing and soldering
- Autogenous welding
- Flame cutting

With DIN 5 Glasses

Art.-No. 530208 EAN 4004625302088





RoProtect protective hand shield

Provides protection during welding

Simple housing made from fire-resistant material with handle | Standardised recording of light stabilisers and glass filters

Product coverage

- For arc welding process (E, MIG, MAG, TIG)

Glass size: 90 x 110 mm

Art.-No. 530201 EAN 4004625027738



RoProtect protective clear vision shield

For safe and extensive protection during welding

Very sturdy housing made from fire-resistant material, ergonomically shaped | With handle and integrated folding mechanism (foldable light protection glass) | Standardised recording of light stabilisers and glass filters

Product coverage

- For arc welding process (E, MIG, MAG, TIG)

Product key features

- Large-scale housing guarantees optimum radiation protection for the eyes and the facial area

Glass size: 90 x 110 mm

Art.-No. 530202 EAN 4004625027745



RoProtect protective head shield

Provides protection during welding

Very sturdy housing made from fire-resistant plastic, ergonomically shaped | Ambidextrous work through the fastening device on the head | Universal fit due to variable sizing | Standardised recording of light stabilisers and glass filters

Product coverage

- For arc welding process (E, MIG, MAG, TIG)

Product key features

- Large-scale housing guarantees optimum radiation protection for the eyes and the facial area

Glass size: 90 x 110 mm

Art.-No. 530203 EAN 4004625027752



Automatic welding protective head shield

The surefire protection during welding – Recommended for DIY and professionals

Very solid housing made of fire resistant plastic, ergonomically shaped | Ambidextrous works by fastening device on the head | Infinitely adjustable headband with automatically darkened active welding glass | Passive DIN 4, active DIN 9–13, infinitely adjustable from the outside | Powered by solar cells | Sensitive adjustment | Temperature resistance up to 130°C | Approved according to EN 175 and EN 379

Product coverage

- For arc welding process (E, MIG, MAG, TIG)

Art.-No. 1500000171 EAN 4004625371312





Prescription glass

Replacement glass for ROTHENBERGER Industrial welding protective screens
Colourless

Product coverage

- For the protection of welding protection glasses

90 x 110 mm

Art.-No. 530204 EAN 4004625302040



Delivery

- 5x Glasses



Protective glass

Replacement glass for ROTHENBERGER Industrial welding protective screens

Product coverage

- Protects conjunctiva against burns

DIN 9 | 90 x 110 mm

Art.-No. 530205 EAN 4004625302057



Delivery

- 2x Glasses

DIN 11 | 90 x 110 mm

Art.-No. 530206 EAN 4004625302064



Delivery

- 2x Glasses



Protective gloves

Quality gloves for optimum heat protection

5-Finger | Size 10 with cuffs | Made from split leather

Product coverage

- Protection for the hands during welding

Art.-No. 530216 EAN 4004625302163



Welding protection spray

Silicone and methylene chloride free

Product coverage

- For the cleaning and keeping clean of welding nozzles
- Protection of the material surfaces to be welded
- To protect the pieces to be welded before spraying without impairing the weld

Contents: 400 ml

Art.-No. 40600 EAN 4004625406007



Chipping hammer

Made from metal | With 2 Schagenden (flat / pointed) | Weight: 430 g

Full Metal | Colour: Red

Art.-No. 530215 EAN 4004625302156



Industrial gases ROTHENBERGER Industrial is a sought after gas specialist in Europe. All gas cartridges, steel and aluminium bottles are certified and comply with the current standards and guidelines. Safety is very important to us. The hazardous materials as well as hazardous material markings are constantly reviewed and adapted to the legal requirements. Consequently, we guarantee smooth running in terms of transport and storage as well as during use.

Our gases are used in the fields of soldering, welding, in heating and in flame technology. To this end, among other special technical requirements, various connectors and temperature options are to be considered.





C200 Supergas

The C200 Supergas piercing cartridge is universally applicable for devices with a corresponding receiving device

High purity butane gas mixture

Product coverage


- This cartridge may be used with any device category immediate butane pressure according to EN 521
- Blow lamps
- Bunsen burner
- Scout camp stove
- Scout camping lamp

Product key features

- Integrated ILL-security system for leakage limit (according to EN 417: 2012)

Contents: 190 g / 330 ml

Art.-No. 1500000924 EAN 4004625387269



Contents: Triple pack: 3x 190 g / 330 ml

Art.-No. 1000000984 EAN 4004625388471



Delivery

- 3x C200 Supergas á 190 g



Multigas 300

Tinplate screwable cartridges

Connection: 7/16" EU | Gas mix: 30 % Propane, 70 % Butane

Contents: 600 ml / 338 g

Art.-No. 35510 EAN 4004625355107



Contents: Double pack: 2x 600 ml / 338 g

Art.-No. 035510D EAN 4004625014080



Multigas Jumbo

Tinplate screw cartridges – special size

Connection: 7/16" EU | Gas mix: 30 % Propane, 70 % Butane

Product key features

- +25 % more content

Contents: 750 ml / 420 g

Art.-No. 1500000045 EAN 4004625368770





Maxigas 400

High performance, welding, cutting and brazing gas

Screw cartridge | Connection: 7/16" EU |

Gas mix: 21.5 % Acetone, 56 % N-Butane Isobutane, 1.5 % Pentane, 21 % Propane

Product coverage

- Gas welding
- Brazing

Product key features

- Facilitates high working temperatures

Contents: 600 ml / 352 g

Art.-No. 35570 EAN 4004625355701



Contents: 600 ml / 352 g

Art.-No. 035570-B EAN 4004625054369



Minigas 100

Mini tinplate screwable cartridges

Connection: 7/16" EU | Gas mix: 30 % Propane, 70 % Butane

Contents: 150 ml / 85 g

Art.-No. 35504 EAN 4004625355046



RoFill Super 100

Aluminium gas refill cartridge

Gas mix: 25 % Propane, 75 % Butane

Product key features

- Various nozzle adapter caps
- High purity for the operation of micro soldering torches

Contents: 100 ml / 56 g

Art.-No. 35840 EAN 4004625358405



Topgas 220

Tinplate screwable cartridges

Connection: 7/16" EU | Gas mix: 30 % Propane, 70 % Butane


Product key features

- High stability for the operation of gas appliances in camping, picnics and various laboratory burners

Contents: 370 ml / 220 g

Art.-No. 35201 EAN 4021572075728



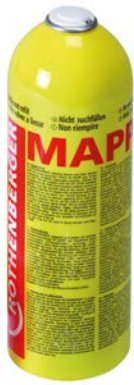

Mapp Gas

ROTHENBERGER special gas mixture

Screw cartridge | Connection: 7/16" EU | Gas mix: Butane – Propylene

Product coverage

- Welding
- Brazing

Product key features

- Allows very high working temperatures
- Constant gas pressure at low ambient temperatures

Contents: 750 ml / 411 g

Art.-No. 035551-A EAN 4004625355510



01

02



Propane small bottle

Steel gas bottle

Connection: G 3/8" L

Product coverage

- Mobile use for roof plumbing and tinsmith works

Product key features

- Suspension facilitates mobile use
- Straightforward and inexpensive refilling with refill spout 032207E
- Lightweight due to lightweight metal bottle

Contents: Empty

Art.-No. 33079 EAN 4004625330791



Delivery

- Propane small bottle with sampling and filling valve (including venting.)
- Feet
- Hook

03

04

05



Our warehouse is well organised.


06

07

08

09

10

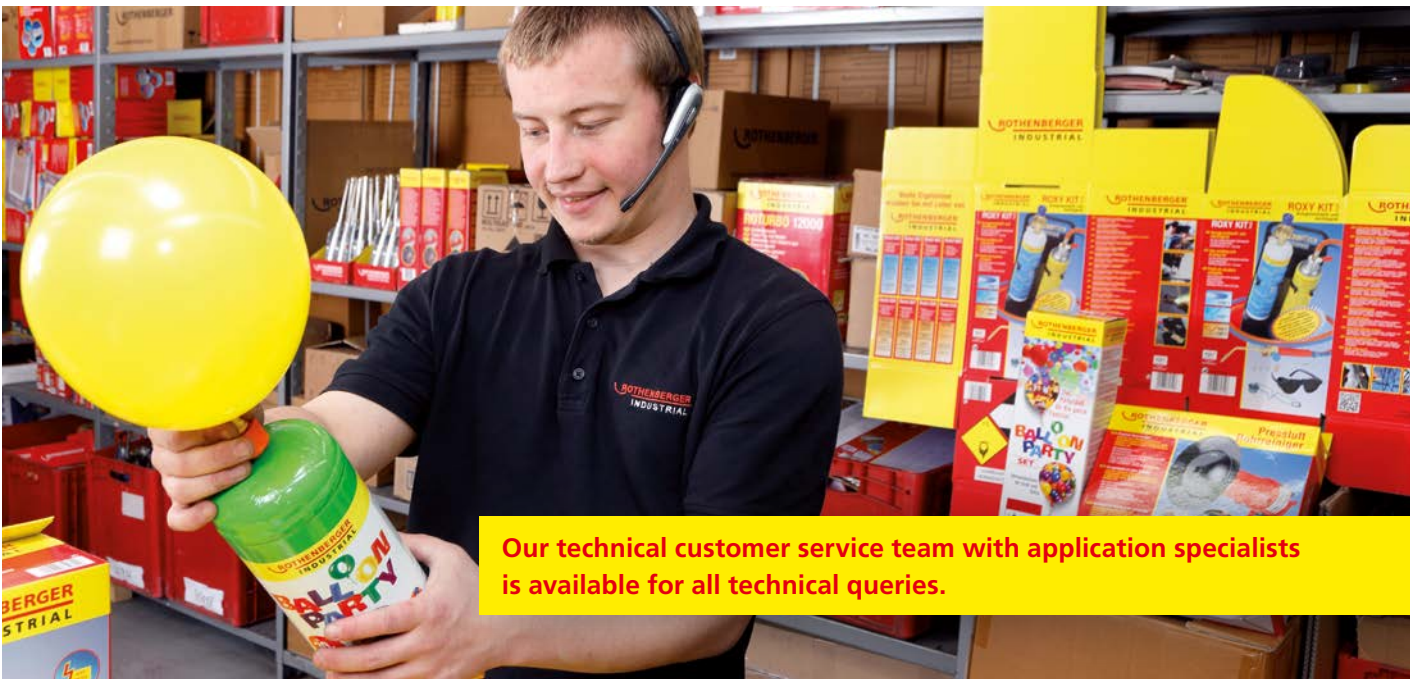

Our technical customer service team with application specialists is available for all technical queries.

Helium



Helium

Steel single use bottle
 Connection: M 10 x 1 | 100 bar

Product coverage
 • Balloon Party Set

Contents: 2.2 l
 Art.-No. 35206 EAN 4004625352069



Protective gas



Argon

Protective gas steel single use bottle
 Connection: M 10 x 1

Product coverage
 • To protect the molten bath during MIG welding
 Product key features
 • 100 % argon

Contents: 950 ml | Full pressure: 60 bar
 Art.-No. 35775 EAN 4004625357750



Carbon dioxide (CO₂)

Protective gas steel single use bottle
 Connection: M 10 x 1

Product coverage
 • To protect the molten bath during MAG welding

Contents: 950 ml | Full pressure: 36 bar
 Art.-No. 35776 EAN 4004625357767



Heating and flaming Flaming devices are used in various areas. The work always proves to be fast and effective.

Among the best known uses of flame technology include the scarfing of roofing felt or bitumen sheeting. However, this is only recommended with warming torches as well as herbicides for an environmentally friendly and economical alternative to conventional weed control.

The installation of roof or bitumen membranes with warming torches has the advantage that no additional adhesive is required and fast work progress is achieved. The bitumen coating is melted by the action of heat with the burner flame and connects with the subsurface.

For the killing of weeds, a special flaming device can be used in the garden or on sidewalks. The plants or plant parts are heated briefly with the flame, so that the cell walls burst and the protein molecules are destroyed.

With this action, the entire plant is killed. The optimal time for this is in the Spring. The younger the plant, the better the result.

This treatment must be repeated several times, as the weed can initially grow strongly due to changes in the plant cells.

Other possible applications of flame technology include warming-up, sealing films, tar work, concrete and masonry drying.





RoMaxi Premium Piezo

The power burner with piezo ignition for flaming and hot glue works

Piezo ignition | Flame temperature: up to 1060°C | Gas pressure: max. 4 bar, 8 kg/h | Short flexing burner with 57 mm | 60 cm long burning pipe, 35° bend

Product coverage

- Scarfing of bitumen sheets
- Warming
- Singe
- Sealing films
- Tar work
- Roof insulation
- Concrete and masonry drying
- Biological weed and moss removal

Product key features

- Lower gas consumption due to exact burner setting
- Piezo ignition

With 5.0 m propane gas hose

Art.-No. 030955E EAN 4004625309551



Delivery

- 1x High performance burner – surface finish & edge reinforced with flame stabiliser
- 1x Propane hose – 5.0 m, G 2 x 3/8" L
- 1x Handle with three-way valve and fixed pilot flame
- 1x 60 cm burner pipe with burner support



RoMaxi Premium

The power burner for flaming and hot glue works

Flame temperature: up to 1060°C | Gas pressure: max. 4 bar, 8 kg/h | Flexing burner with 60 cm approx. 35° bend | Burner: Ø 57 mm

Product coverage

- Scarfing of bitumen sheets
- Warming
- Singe
- Sealing films
- Tar work
- Roof insulation
- Concrete and masonry drying
- Biological weed and moss removal

Product key features

- Lower gas consumption due to exact burner setting

With 5.0 m propane gas hose

Art.-No. 030954E EAN 4004625309544



Delivery

- 1x High performance power burner – surface finish & edge reinforced with flame stabiliser
- 1x Propane hose – 5.0 m, G 2 x 3/8" L
- 1x Handle with three-way valve and fixed pilot flame
- 1x 60 cm burner pipe with burner support

With 5.0 m propane gas hose & propane constant regulator

Art.-No. 030957E EAN 4004625309575



Delivery

- 1x High performance power burner – surface finish & edge reinforced with flame stabiliser
- 1x Propane hose – 5.0 m, G 2 x 3/8" L
- 1x Propane constant regulator
- 1x Handle with three-way valve and fixed pilot flame
- 1x 60 cm burner pipe with burner support



RoMaxi Economy

The power burner for flaming and hot glue works in an economy version

Flame temperature: up to 1060°C | Gas pressure: max. 4 bar, 8 kg/h | Burner flexing with 60 cm, 35° bend | Burner: Ø 57 mm

Product coverage

- Scarfing of bitumen sheets
- Warming
- Singe
- Sealing films
- Tar work
- Roof insulation
- Concrete and masonry drying
- Biological weed and moss removal

Product key features

- Lower gas consumption due to exact burner setting

With 5.0 m propane gas hose

Art.-No. 030958E EAN 4004625309582




Delivery

- 1x High performance burner – galvanised steel & reinforced edges
- 1x Propane hose – 5.0 m, G 2 x 3/8" L
- 1x Handle with three-way valve and fixed pilot flame
- 1x 60 cm burner pipe with Burner support

With 5.0 m propane hose & propane constant regulator

Art.-No. 150000930 EAN 4004625388198



Delivery

- 1x High performance burner – galvanised steel & reinforced edges
- 1x Propane hose – 5.0 m, G 2 x 3/8" L
- 1x Propane constant regulator
- 1x Handle with three-way valve and fixed pilot flame
- 1x 60 cm burner pipe with burner support



RoMini Premium

The power burner for flaming and hot glue works in a handy small format

Flame temperature: up to 1060°C | Gas pressure: max. 4 bar, 8 kg/h | Short flexing burner with 30 cm, ca. 30° bend | Burner: Ø 54 mm

Product coverage

- Scarfing of bitumen sheets
- Warming
- Singe
- Sealing films
- Tar work
- Roof insulation
- Concrete and masonry drying
- Biological weed and moss removal

Product key features

- Lower gas consumption due to exact burner setting

With 2.0 m propane gas hose

Art.-No. 030961E EAN 4004625309612



Delivery

- 1x High performance burner with flame stabiliser
- 1x Propane hose – 2 m, G 2 x 3/8" L
- 1x Handle with three-way valve and fixed pilot flame



Turbo Plus

The broad-beam universal burner with jumbo multi-gas giant for very good flaming results

Flame temperature: 940°C

Product coverage

- Thermal weed and moss eradication
- Warming
- Singe
- Sealing of films

Product key features

- High productivity per unit area
- Wide burner flame
- Piezo ignition
- Eco-Friendly
- Sustainable

With 1x Multigas Jumbo cartridge

Art.-No. 1000001250 EAN 4004625396520



Delivery

- 1x Turbo Plus
- 1x Multigas 300 jumbo cartridge (+25 % more content)



Universal burner

The proven universal burner for various flaming work

Flame temperature: 940°C

Product coverage

- Thermal weed and moss eradication
- Warming
- Singe
- Sealing of films

Product key features

- Piezo ignition
- Eco-Friendly
- Sustainable

Without gas

Art.-No. 30966 EAN 4004625309667



Delivery

- 1x Universal burner

With 1x Multigas 300 jumbo cartridges

Art.-No. 1000000189 EAN 4004625373255



Delivery

- 1x Universal burner
- 2x Multigas 300 Jumbo cartridges

With 2x Multigas 300 cartridges

Art.-No. 1000000557 EAN 4004625380963



Delivery

- 1x Universal burner
- 2x Multigas 300 cartridges



Electric weedkiller

On Page 63 you find the new Electric weedkiller



Propane gas leak protection

Security element for the operation of gas appliances

10–14 kg/h, 2 x G 3/8" L-DVGW checked | Usable together with propane regulators with G 3/8" L outlet | Mounting directly on the controller

Product coverage

- Gas soldering equipment with hose lengths of over 5.0 m
- Required for commercial use

Product key features

- Immediately stops the gas supply in case of hose damage

1.5–4 bar

Art.-No. 035925E EAN 4004625359259



Propane regulator

0.5–4 bar | Infinitely adjustable | W 21.8 x 1/14" L-D max. 8 kg/h | DVGW-checked

Product coverage

- For propane gas bottles 5 kg, 11 kg, 33 kg and gas soldering equipment with hose connection G 3/8" L

0.5–4 bar

Art.-No. 032081E EAN 4004625320815



Propane regulator

0.5–4 bar | Infinitely adjustable | W 21.8 x 1 / 1/14" L-D max. 8 kg/h | DVGW-checked

Product coverage

- For propane gas bottles 5 kg, 11 kg, 33 kg and gas soldering equipment with hose connection G 3/8" L

0.5–6 bar

Art.-No. 032082E EAN 4004625014646



Propane regulator with manometer

0.5–4 bar | W 21.8 x 1/14" L / G 3/8" L-D max. 8 kg/h | DVGW-checked

Product coverage

- For propane gas bottles 5 kg, 11 kg, 33 kg, and gas soldering equipment with hose connection G 3/8" L

Product key features

- High optimal control range for heating torch
- Pressure indication by manometer

Includes Manometer, infinitely adjustable

Art.-No. 032100E EAN 4004625321003



Propane constant regulator

W 21.8 x 1/14" L – G 3/8" L-D max. 8 kg/h | DVGW-checked

Product coverage

- For propane gas bottles 5 kg, 11 kg, 33 kg and gas soldering equipment with hose connection G 3/8" L

4 bar

Art.-No. 030925E EAN 4004625309254





01

02

03




Propane refill connection

Product coverage

- For connection to propane gas bottles 5 kg, 11 kg, 33 kg
- For the filling of propane small bottles (033079)

W 21,8" L / G 3/8" L

Art.-No. 032207E EAN 4004625322079



04



Propane gas hose line

Pressure: 2 MPa (20 bar) | Ø 5 mm | Connection: 2 x G 3/8" L | certified according EN 1327

Product key features

- Can be used in conjunction with double nipple (item 540255E) as an extension tube

Length: 2.0 m

Art.-No. 030927E EAN 4004625309278



Length: 2.5 m

Art.-No. 032201E EAN 4004625322017



Length: 5.0 m

Art.-No. 033310E EAN 4004625333105



05

06

07

08



Double nipple

For the secure lengthening of propane gas hoses

Product coverage

- Extension of propane gas hoses

Connection: 2x G 1/4" L

Art.-No. 540251E EAN 4004625402511



Connection: 2x G 3/8" L

Art.-No. 540255E EAN 4004625001929



09

10

Camping, Garden & Household

Whether for the household, camping or a cheerful garden party, ROTHENBERGER Industrial has the right equipment for you.

Our camping stove with either a single flame or two flame option, is simple and safe to handle as well being portable. Whether you are cooking, heating, warming or frying, you always have the optimal solution when travelling. In addition to this, our camping lamp always ensures sufficient illumination.

Our LED lights are excellent for travelling and when stationary have a high luminosity and due to the LED technology, they have a long functional life.

They are light, easy to handle and equipped with additional functions.

With our household items you can make every celebration an unforgettable experience with family or colleagues.

What is a garden party or family celebration without fun helium balloons? With our set every party is a special experience for friends and family.





Crème Brûlée Set

Creative in the kitchen with the professional gourmet burner

Working temperature: 450°C

Product coverage

- The Gourmet Burner is designed for cooking foodstuffs
- Whether used for the flambé, caramelisation, browning, gratinising of food and desserts, the crème brûlée Gourmet Burner makes this easy and secure

Product key features

- Ready to use (including RoFill gas cartridge)
- Easy to use
- Easy refillable
- Big gas tank for long operating time
- Stable
- Piezo ignition

Includes Rofill Gas cartridge

Art.-No. 035126E EAN 4004625053065



Delivery

- 1x Gourmet Burner
- 1x Pedestal
- 1x RoFill Super 100 cartridge



Balloon Party Set

Helium balloons for all ages – Party fun for the whole family

Our balloon Party Set includes everything you need for a great flying balloon ideas. After use, the helium bottle can be disposed of easily. Simply attach balloon, turn the shutter and slowly inflate the balloon to the desired size.

Product coverage

- Ideally suited for occasions such as birthdays
- Wedding
- Carnival
- And many other celebrations

Product key features

- Easy to use
- Ready to use

Art.-No. 035206E EAN 4004625054062



Delivery

- 1x Helium-disposable cartridge – 2 l
- 1x Security extraction valve
- 25x Latex balloons á 25 cm
- 1x Egg shaped ball ribbon



Bunsen burner

The ideal burner for heating in goldsmith and laboratory work as well as in glass and plastic processing

Flame temperature: 900°C | Gas consumption in normal use: 45 g/h / 1.0 kW

Product coverage

- Crafts: Optics & Goldsmith's work
- Industrial laboratories Physics, Chemistry and Pharmaceutics
- School lessons: Practical work and experiments

Product key features

- Stable
- Exact flame adjustment

Art.-No. 1500000194 EAN 4004625371503





Scout camping lamp

The mobile light for camping, household and garden

Product key features

- With piezo ignition for easy lighting
- Safe operation
- Quickly ready
- Safe and easy centering
- Quick change of cartridge
- Stable with handle
- Temperature resistant safety glass
- Sturdy plastic housing

Art.-No. 35902 EAN 4004625359020



Delivery

- 1x Camping lamp
- 3x Incandescent mantles



Scout camping cooker

The mobile stove for camping, household and garden

Cooking edition: approximately 14 cm | Operate with piercing Supergas C200 cartridge

Product key features

- Secure stand with handle
- Three-point pot ring – non-tilting
- Pot ring, Burner and windshield made from surface treated metal
- Sturdy plastic housing

Art.-No. 35904 EAN 4004625359044



Duo camping cooker

The mobile cooker for camping, household and garden

Power Rating: large burner: 1.70 kW, middle burner: 1.20 kW | Consumption: large burner: 121 g/h, middle burner: 85 g/h | Connect to propane gas bottles (5 kg and 11 kg) with pressure reducer 50 mbar | With hose (0.8 m, Connection: G 1/4" L) and controller (50 mbar)

Product coverage

- Recommended for Ø 16–22 cm heads

Product key features

- Two cooking zones with stable pot rings (chrome)
- Enamelled housing
- Wind Stable Burner

Includes Hose and regulator

Art.-No. 35940 EAN 4004625359402



Delivery

- 1x Two-flame stove
- 1x Hose – 80 cm with connection 2x G 1/4" L
- 1x Propane regulator – 50 mbar



Bench cooker

The ideal companion for camping, outdoor and leisure

Burner made of solid cast iron | Stable construction made of sheet steel

Product coverage

- For stews, soups, stew and mulled wine
- For heating and browning in a pan or wok

Performance: 7.5 kW

Art.-No. 1500001392 EAN 4004625396223



Delivery

- 1x Bench cooker
- 1x Hose assembly – 1.5 m – G 1/4" L
- 1x Propane constant regulator – 50 mbar



Electric weedkiller

Fast environmentally friendly burning or charring of weeds

Rated voltage: 230 V / 50 Hz | 2 metre cable

Product coverage

- Weed and moss removal

Performance: 2000 W

Art.-No. 1500002183 EAN 4004625405710



Delivery

- 1x Electric weedkiller (unit disassembles into three parts)
- 1x Nozzle attachment

01

02

03

04

05

06

07

08

09

10



LED economy head lamp

The mobile light source on the go

With 3 lighting functions for distance and near zones. The elastic lanyard is adjustable in size. The light carrier is adjustable and movable as required.

Product coverage

- Additional lighting while cycling
- Repair work in the dark
- Leisure activities (fishing, camping, hiking)

LED performance: 1 W

Art.-No. 1500001450 EAN 4004625396537



Delivery

- 1x Headlamp
- 3x 1.5 V AAA batteries



LED premium head lamp

The mobile light source on the go

With 3 lighting functions for distance and near zones. The elastic lanyard is adjustable in size. The light carrier is adjustable and movable as required.

Product coverage

- Additional lighting while cycling
- Repair work in the dark
- Leisure activities (fishing, camping, hiking)

LED performance: 3 W

Art.-No. 1500001451 EAN 4004625396551



Delivery

- 1x Headlamp
- 3x 1.5 V AAA batteries



LED multi function light

The handy multifunctional light with USB output

18x powerful white LED | Dimming function 100 % - 50 % |

Strong lithium-ion battery | Rechargeable battery |

Charging options: 230 V (power outlet), 12 V (car) and 5 V (USB)

Product key features

- USB output for charging of mobile devices
- Easy installation due to hook or magnet

Art.-No. 1500000891 EAN 4004625386804



Delivery

- 1x LED multifunction light
- 1x 230 V charger
- 1x 12 V car adapter
- 1x USB cable



Mini gas lighter

Product key features

- Piezo ignition
- Trigger lock
- Fuel gauge
- Refillable

Includes Piezo ignition and gas display

Art.-No. 035992E EAN 4004625359921



Standard gas lighter

Product key features

- Piezo ignition
- Fuel gauge
- Trigger lock
- Refillable
- Child safety lock

Includes Piezo ignition and gas display

Art.-No. 035990E EAN 4004625359907



Storm safe gas lighter

Product key features

- Storm safe
- Piezo ignition
- Fuel gauge
- Trigger lock
- Refillable
- Child safety lock

Includes Piezo ignition and gas display

Art.-No. 035991E EAN 4004625359914



Gooseneck gas lighter

Product key features

- Storm-proof
- Piezoelectric ignition
- Fuel gauge
- Trigger lock
- Refillable
- Child safety
- Portable Gooseneck

Includes Piezo ignition and gas display

Art.-No. 150000023 EAN 4004625368077



Sanitary installation The pipe processing and pipe cleaning has a very long tradition at ROTHENBERGER. To this day, an innovative range of products for the plumbing and heating installer sits at the heart of ROTHENBERGER. Many patents, excellent problem solving, robust and high quality tools link the installer with the ROTHENBERGER brand.

ROTHENBERGER Industrial implements this from day one for the handyman. We align our assortment to the needs of the handyman but the professional also benefits.

We put our emphasis on pipe machining and tube cleaning, while the focus is on a simple and secure handling, durability and quality.

In our range you will find the right pliers for each application. Accurately fitting pliers for gentle gripping, high-quality water pump pliers and premium corner pipe wrenches with S-mouth for universal use are available.

Pipe threading, pipe bending, pipe cutters; we offer our customers a large selection of these products in a high quality.

To complete our range, we offer various cleaning equipment for different applications. In this area we place great emphasis on environmentally friendly solutions.





Sanikit

The professional complete set in a plastic case for the handyman

Product coverage

- For all installation work in plumbing and heating systems | Ideal for repair and assembly as well separating steel pipes up to \varnothing 1 1/4" (31.75 mm)
- Threading to \varnothing 1" (25.4 mm) | Recommendation: Always use thread cutting oil (eg Ronol Syn 65013)
- Assembly, screw fittings, grommets and sealing of threaded fasteners Up to \varnothing 1 1/4" (31.75 mm)

Art.-No. 070673E EAN 4004625706732



Delivery

- 1x Plastic case
- 1x Ratchet lever, 2-piece
- 1x Ratchet thread cutter Super Cut 1 1/4", with small 8-edge and proven Quick-change
- 3x Thread cutters with small outer-octagon (BSPT right 1/2" – 3/4" – 1") for tapered (conical) pipe thread 1: 16
- 1x Steel pipe cutter – 1 1/4"
- 1x Corner pipe wrench – 1"
- 1x Water pump wrench – 250 mm, 10"
- 1x Roll of Teflon tape



Tube Cutter 30

Pipe cutters

Robust monobloc sledge and two guide rollers with recess for hemming sewing section

Product coverage

- For cutting copper, brass, aluminium and thin-walled steel pipes

Product key features

- With folding inner de-burrer and spare cutter wheel in the handle

\varnothing : 3 mm – 30 mm (1/8" – 1 1/8")

Art.-No. 070641E EAN 4004625706411



Tube Cutter 35

Telescopic pipe cutters

Robust construction and two guide rollers with recess for hemming sewing section

Product coverage

- For cutting copper, brass, aluminium and thin-walled steel pipes

Product key features

- With folding inner de-burrer
- Spare cutter wheel in the handle

\varnothing : 6 mm – 35 mm (1/4" – 1 3/8")

Art.-No. 070941E EAN 4004625709412





Tube Cutter 42

Telescopic pipe cutters

Robust construction and two guide rollers with recess for hemming sewing section

Product coverage

- For cutting copper, brass, aluminium and thin-walled steel pipes

Product key features

- With folding inner de-burrer
- Spare cutter wheel in the handle

Ø: 3 mm–42 mm (1/8" – 1 5/8")

Art.-No. 070642E EAN 4004625706428



MiniMax

Pipe cutters

With two support rollers with groove for flanged seam section

Product coverage

- For cutting copper, brass, aluminium and thin-walled steel pipes

Product key features

- Handy design with small working radius
- Effortless tensioning due to large knurled knob
- Ergonomic design of the base body

Ø: 3 mm–28 mm (1/8" – 1 1/8")

Art.-No. 070644E EAN 4004625706442



MiniCut

Pipe cutters

With two support rollers with groove for flanged seam section

Product coverage

- For cutting copper, brass, aluminium and thin-walled steel pipes

Product key features

- Handy design with very small working radius
- Effortless tensioning due to large knurled knob
- Ergonomic design of the base body

Ø: 3 mm–22 mm (1/8" – 7/8")

Art.-No. 070640E EAN 4004625706404



Steel pipe cutter

Width rollers for reliable guidance and chrome plated spindle | All-steel, drop forged | With chrome plated stem and wide rolls for safe operation

Product coverage

- Ideal for exact cutting of steel pipes

Product key features

- External burr-free cutting pipe threads
- Simple pressure regulation for optimum power transfer to the tube
- Long service life through hardened cutting wheel from high-alloy steel

Ø: 10 mm–42 mm (1/8" – 1 1/4")

Art.-No. 070643E EAN 4004625706435





Pipe vice

All-steel forged | hinged

Product coverage

- Ideal for pipe working in plumbing and heating installation

Product key features

- With automatic locking hook
- Movable top jaw for secure grip
- Milled upper jaw and lower jaw pad, Hardened and replaceable
- Strong, smooth spindle
- Pipe support
- Epoxy powder coating

Ø: 10 mm – 60 mm (1/8" – 2")

Art.-No. 070674E EAN 4004625706749



01

02

03



SuperCut caliper ratchet

For threading of BSPT right

Ratchet lever 2-piece | Ratchet tap wrench with 8-edge direct support | Safe stop of cutting heads

Product coverage

- For the recording of tapping heads with outer-8-edge

Product key features

- Power saving by lever function
- Handy, lockable switch the in ratcheting direction

Ø: 1/4" – 1 1/4"

Art.-No. 070664E EAN 4004625706640



04

05



Thread cutting head

For tapered (conical) external pipe thread 1:16 BSPT right | With external 8-edge

Product key features

- Faster cutting through advanced chip ejection chambers
- Reinforced locking ring and precise cutting jaw set
- Cutting jaws interchangeable

Ø External pipe thread: 3/8"

Art.-No. 070755E EAN 4004625707555



Ø External pipe thread: 1/2"

Art.-No. 070756E EAN 4004625707562



Ø External pipe thread: 3/4"

Art.-No. 070757E EAN 4004625707579



Ø External pipe thread: 1"

Art.-No. 070758E EAN 4004625707586



Ø External pipe thread: 1 1/4"

Art.-No. 070759E EAN 4004625707593



07

08

09

10

06



SuperCut Set

Professional annular screw set with 3 cutting heads

For threading of BSPT right | Ratchet lever divided (2-piece handle), with 8-socket direct support | Safe Stop of cutting heads | Easy insertion and removal | Faster cutting through advanced chip ejection chambers | Reinforced locking ring and precise cutting back seat | Small teeth and reduced ratchet angle

Product coverage

- For producing precision standardised threaded connections

Product key features

- Power saving by lever function
- Handy, lockable switch the ratcheting direction
- Perfect centering
- Optimised cutting geometry allows easy gating and excellent chip flow
- In plastic carrying case
- Fast cutting through advanced chip ejection chambers
- Easy insertion and removal of the cutter heads

With 3 cutting heads: Ø 1/2" – 3/4" – 1"

Art.-No. 070780X EAN 4004625707807



Delivery

- 1x Thread cutting ratchet
- 1x Cutting head 1/2"
- 1x Cutting head 3/4"
- 1x Cutting head 1"
- 1x Plastic case
- 1x Ratchet lever – 2-piece



SuperCut Premium

Annular screw set with 4 cutting heads

For threading of BSPT right | Ratchet lever divided (2-piece handle), with 8-socket direct support | Safe Stop of cutting heads | Easy insertion and removal | Faster cutting through advanced chip ejection chambers | Reinforced locking ring and precise cutting back seat | Small teeth and reduced ratchet angle

Product coverage

- For producing precision pipe threaded connections

Product key features

- Power saving by lever function
- Handy, lockable switch the ratcheting direction
- Perfect centering
- Optimised cutting geometry allows easy gating and excellent chip flow
- In plastic carrying case

With 4 cutting heads: Ø 1/2" – 3/4" – 1" – 1 1/4"

Art.-No. 070669E EAN 4004625706695



Delivery

- 1x Plastic case
- 1x Thread cutting ratchet
- 1x Cutting head 1/2"
- 1x Cutting head 3/4"
- 1x Cutting head 1"
- 1x Cutting head 1 1/4"
- 1x Ratchet lever – 2-piece



Copper pipe outer brush

For simple and effective treatment of the solder joint

Product key features

- Stable and easy-grip plastic housing

Ø: 12 mm

Art.-No. 854191 EAN 4004625541913



Ø: 15 mm

Art.-No. 854193 EAN 4004625541937



Ø: 18 mm

Art.-No. 854195 EAN 4004625541951



Ø: 22 mm

Art.-No. 854196 EAN 4004625541968



Copper pipe inner brush

For quick cleaning of solder fittings

Ø: 12 mm

Art.-No. 854181 EAN 4004625541814



Ø: 15 mm

Art.-No. 854183 EAN 4004625541838



Ø: 18 mm

Art.-No. 854185 EAN 4004625541852



Ø: 22 mm

Art.-No. 854186 EAN 4004625541869



Internal and external milling cutter

Product coverage

- For effortless deburring of the cut surfaces of copper, aluminium and mild steel pipes

Product key features

- The special arrangement of three ground and hardened steel blade guarantees smooth surfaces without grooves

Ø: 4 mm–36 mm

Art.-No. 011080E EAN 4004625110805



Basin wrench

Chrome vanadium special steel | Drop forged | Very robust

Product coverage

- Ideal for installation of stand taps of washbasins

Product key features

- Optimum power transmission due to-handle
- Swivel claw for clockwise and counterclockwise operation

Ø: 10 mm–32 mm (3/8–1 1/4") | Length: 275 mm

Art.-No. 070676E EAN 4004625706763





Water pump pliers

Chrome vanadium steel | Drop forged | Hardened | Smoothed plier head | Self-clamping jaws | Induction hardened teeth | Crush and pinch protection on the handles | 7 settings

Product coverage

- For secure holding of pipes and flat material, as well as square and hexagonal screw connections

Product key features

- Ideal for hard to reach places due to long, slender plier head – excellent for corners

Ø: 1" / 33 mm | Length: 180 mm / 7"

Art.-No. 070651E EAN 4004625706510



Ø: 1 1/2" / 48 mm | Length 300 mm / 12"

Art.-No. 070652E EAN 4004625706527



Ø: 1 1/4" / 42 mm | Length: 250 mm / 10"

Art.-No. 070650E EAN 4004625706503



45° corner pipe wrench

Chrome vanadium steel | All-steel, drop forged | Hardened, S-shaped mouth | Reinforced sleeve | Smoothed jaws | Secure and non-slip grip by staggered toothing

Product coverage

- For secure holding of pipes, screw fittings, round materials, etc.

Product key features

- Clamp protection prevents jamming
- Universal use in the installation area

Ø: 1" / 33 mm | Length: 320 mm / 12"

Art.-No. 070656E EAN 4004625706565



Ø: 1 1/2" / 48 mm | Length: 425 mm / 16"

Art.-No. 070657E EAN 4004625706572



Ø: 2" / 60 mm | Length: 560 mm / 20"

Art.-No. 070658E EAN 4004625706589



90° fitting pliers

Chrome vanadium special steel | All-steel, drop-forged

Product coverage

- Plastic jaws ensure safe and gentle grip especially for chrome fittings and polished surfaces, fittings or metal sheets

Product key features

- Non-slip side shape
- Anti-trap prevents jamming
- Jaws made of special plastic

Ø: 1" / 35 mm

Art.-No. 070659E EAN 4004625706596





Plastic pipe cutters

Ideal for plumbers, fitters and mechanics

Product coverage

- For effortless cutting of plastic pipes and multi-layer composite pipes up to Ø 42 mm

Product key features

- Adjustable blade base position
- Use a screwdriver to change the blade

Ø: 26–42 mm

Art.-No. 36011 EAN 4004625360118



01



Plastic pipe cutters

Ideal for plumbers, fitters and mechanics

Product coverage

- For effortless cutting of plastic pipes and multi-layer composite pipes up to Ø 36 mm

Product key features

- Adjustable blade base position
- Use a screwdriver to change the blade

Ø: 36 mm

Art.-No. 36010 EAN 4004625360101



02

03



Plastic cutting shears

Ideal for plumbers, fitters and mechanics

Product coverage

- For effortless cutting of plastic pipes and multi-layer composite pipes up to Ø 42 mm diameter
- For effortless one-handed cutting of PE, PP, VPE, PB and PVDF pipes
- For plumbing and heating systems and plant engineering
- Particularly suitable to prepare for socket welding

Product key features

- Fixing the pliers legs for transport
- Automatic & controlled opening of the blade at the push of a button
- Minimum effort during cutting
- Precise force transfer and guided cutter feed
- Point precision without deformation and square cut

Art.-No. 55099 EAN 4004625550991



04

05

06



Economy plastic pipe shears

Ideal for plumbers, fitters and mechanics

Product coverage

- For effortless cutting of plastic pipes and multi-layer composite pipes up to Ø 42 mm

Product key features

- With ratchet mechanism for optimal power transfer

Art.-No. 36099 EAN 4004625360996



07

08



Premium plastic pipe shears

Ideal for plumbers, fitters and mechanics

Product coverage

- For effortless cutting of plastic pipes and multi-layer composite pipes up to Ø 42 mm

Product key features

- With stainless steel blade and safety latch

Art.-No. 36012 EAN 4004625360125



09

10



RoCut plastic pipe shears

Double sided guided blade and ratchet feed | Width pipe support for rectangular section (orbital cut) | Particularly suitable for the preparation for socket welding

Product coverage

- Effortless one-handed cutting of PE, PP PEX, PP and PVDF pipes. For plumbing and heating systems as well as plant engineering

Ø: 32 mm

Art.-No. 055090E EAN 4004625006917



Ø: 6–42 mm

Art.-No. 055091E EAN 4004625006894



Replugging ratchet

Reversible R/L | Chrome vanadium steel | With 4-socket set

Product coverage

- For universal spud wrenches

Product key features

- Quick and easy assembly

Ø: 1/2"

Art.-No. 027180E EAN 4004625006832



Water tap reseating tool

Complete with 2 cutter heads and 2 seals

Cylindrical stepped threaded receptacle for all common fittings

Product coverage

- Uncomplicated application by exact-milling of the valve seat of leaking water valves

Product key features

- Precise work due to adjustable cutting pressure by spring and adjusting screw
- Interchangeable cutters

Ø: 3/8" – 1/2"

Art.-No. 070663E EAN 4004625706633



Delivery

- 1x Ground milling machine
- 1x Milling head 3/8"
- 1x Milling head 1/2"
- 2x Seals



Screw hole

For material thicknesses up to max. 4 mm

Product coverage

- For uniform, deformation-free punching of sheet metal, such as steel, V2A, Copper and aluminium
- Ideal for hard to reach places such as in switch cabinets, junction boxes, instrument panels, sink unit basins and bodies

Product key features

- Optimal support due to 3-point gating
- Extremely durable due to metric lag screw

Ø: 32 mm

Art.-No. 021832E EAN 4004625006863



Ø: 35 mm

Art.-No. 021835E EAN 4004625023150





SaniGrip

Syphon pliers

Chrome vanadium special steel | All-steel forged | Chrome plated | Mounted plastic jaws

Product coverage

- Tightening and releasing of plastic pipe threaded connections
- Installation of filtering equipment in swimming pool area with round union nuts up to Ø 62 mm (siphon)

Product key features

- 4-way adjustable joint
- With toothed jaws of plastic

Clamping range: 15–62 mm | Length: 10", 250 mm

Art.-No. 070662E EAN 4004625706626



01

02



MiniBend

Hand bending device

Product coverage

- Two-hand bending up to 180° of tubes made from soft copper, brass, aluminium and steel
- Refrigeration and air conditioning
- Automotive, hydraulic and pneumatic equipment

Product key features

- Minimum level and bending angle display on Bending scale

Ø: 6 – 8 – 10 mm (1/4" – 5/16" – 3/8")

Art.-No. 025160E EAN 4004625251607



03

04



GratFix

The quick trimmer with replaceable HSS universal blade

Product coverage

- For deburring edges on pipes, fittings, holes etc.

Product key features

- Always have a spare blade at hand
- Blade reservoir in the handle

Art.-No. 021659E EAN 4004625216590



05

06



Universal spud wrench

Step shape: 3/8" – 1/2" – 3/4" – 1" | Chrome vanadium steel (hardened and nickel-plated) | Square drive 1/2" with cam, hexagonal (6 point) and 12 point synchronisation

Product coverage

- For installation and removal of radiator valve nipples, return screw connections, tap extensions etc.

Product key features

- No canting in nipples and screw connections due to the special design of the step spanner

Art.-No. 073298E EAN 4004625732984



07

08



Sliding sleeves kit

Product coverage

- Plastic pipe joints
- Sleeve moulding technology

Product key features

- Fast lot- and thread depth press connections
- Kit packed in a handy plastic case

Art.-No. 1500002197 EAN 4004625406434

Delivery

- 1x Plastic pipe shears – 42 mm
- 1x Sliding sleeves device with 3 adapters (12, 16, 20 mm)
- 1x Expandable pliers – 12 to 20 mm
- 1x Plastic case



09

10



Copper pipe flexible spring

Angled cone, cadmium plated

Product coverage

- For hand bending of soft copper pipe

Ø: 10 mm

Art.-No. 025162E EAN 4004625251621



Ø: 12 mm

Art.-No. 025163E EAN 4004625251638



Ø: 15 mm

Art.-No. 025165E EAN 4004625251652



RoLokus toilet seat assembly wrench

Installation wrench, plastic | Easy installation due to adjustable tilt angle

Product coverage

- Mounting of toilet seat sets

Art.-No. 036040E EAN 4004625360408



Mixing nozzle key

Made from robust plastic

Product coverage

- For easy replacement of conventional aerators on taps and fittings

Product key features

- No scratching of chrome-plated surfaces with mixing nozzles and fittings

Art.-No. 070615E EAN 4004625706152



Hemp dispenser

Product coverage

- For thread sealing in heating and plumbing technology

Length: 40 m

Art.-No. 070623E EAN 4004625006979



Teflon band

In practical dispenser

Product coverage

- For clean sealing of metal and plastic screw threads

Length: 12 m

Art.-No. 070624E EAN 4004625706244





Sanifresh

Cleaning spray

Disinfecting and deodorising cleaning spray | Eliminates the risk of disease and allergies | Spray directly on infected surfaces | Eliminates unpleasant odours with a pleasant mint fragrance

Product coverage

- Ideal for air conditioning systems
- Application to eliminate mites, dust, bacteria and fungal spores

Product key features

- Spray can with spray head and spray tube

Contents per bottle: 400 ml

Art.-No. 85800 EAN 4004625858004



Ronol Syn

High-Performance tapping fluid

Mineral oil free | On synthetic base | Water and sanitation installation allowed | DVGW and SVGW approved

Product coverage

- For perfect and clean threads
- Coolant when sawing metals

Product key features

- Outstanding cooling / lubrication properties
- High pressure resistance
- Long service life of cutting tools
- Skin-friendly
- 100 % water soluble
- Silicone-free and easy to wash out

Contents: 600 ml

Art.-No. 65013 EAN 4004625650134



RoTest leak detection spray

For detecting leakages on gas pipes, gas cylinders, tanks, valves and pipe connections | Neutral towards the common combustible gases and refrigerants | Besides the foaming no further reaction takes place

Product coverage

- Ideal for visual inspection of gas pipelines, pressure vessels, etc.

Product key features

- Simple and cost-effective handling – always ready
- Highly sensitive foam spray for fast and safe detection of leaks

Contents: 400 ml / 470 g

Art.-No. 65000 EAN 4004625650004





Cleaning spiral with curved tip

Highly flexible cleaning spiral made of spring steel with plastic coating

Ø Spiral: 6.7 mm | With curved tip claw and hand crank

Product coverage

- For the cleaning, clearing and re- making of drainage and sewage pipes made of plastic, cast iron or stoneware with Ø 10–50 mm

Product key features

- The plastic coating protects the surface of the pipes and ensures a long service life of the spiral
- No decomposition of the spiral turns
- Easy cleaning

Length: 1.5 m

Art.-No. 072980E EAN 4004625729809



Length: 2.5 m

Art.-No. 072981E EAN 4004625729816



Length: 5.0 m

Art.-No. 072982E EAN 4004625729823



Cleaning spiral with return drill

Highly flexible cleaning spiral made of spring steel

Ø Spiral: 9 mm | With return drill and hand crank

Product coverage

- Cleaning, clearing and re- making of drainage and sewage pipes made of plastic, cast iron or stoneware with Ø 50–100 mm

Product key features

- Sturdy stainless steel ensures optimum power transfer
- Galvanized version prevents corrosion

Length: 5.0 m

Art.-No. 072984E EAN 4004625729847



Length: 7.0 m

Art.-No. 072985E EAN 4004625729854



Length: 10.0 m

Art.-No. 072986E EAN 4004625729861





Pipe cleaning cables with claw

Highly flexible cleaning spiral made of spring steel
With return drill and hand crank

Product coverage

- Cleaning, clearing and re-making of drainage and sewage pipes made of plastic, cast iron or stoneware with 30–100 mm

Product key features

- Sturdy stainless steel ensures optimum power transfer
- Galvanized version prevents corrosion

Length: 3.0 m | Ø: 6 mm

Art.-No. 1500000139 EAN 4004625370216



Length: 3.0 m | Ø: 9 mm

Art.-No. 1500000140 EAN 4004625370223



Length: 10.0 m | Ø: 9 mm

Art.-No. 1500000141 EAN 4004625370230



Pipe-perfect

Highly flexible cleaning spiral made of spring steel in a plastic spiral holder with Adapter

Adapter allows driving with electric drill and electric screwdriver | Ø Spiral: 6 mm

Product coverage

- Cleaning, clearing and re- making of drainage and sewage pipes made of plastic, cast iron or stoneware with Ø 50–100 mm

Product key features

- Sturdy spring steel ensures optimum power transfer
- Galvanized version prevents corrosion
- Closed spiral container made from sturdy plastic
- Compact design
- Adapter for drive with drill and electric screwdriver for comfortable work

Length: 4.5 m

Art.-No. 072990E EAN 4004625053812



RoJet Premium

Drain and syphon cleaner

Product coverage

- Removal of blockages in drains and drain pipes through use of the water pressure

Product key features

- The included adapter allows you to connect to almost all commercially available fittings
- Environment-friendly without chemicals
- Low water consumption

Art.-No. 70940 EAN 4004625709405

Delivery

- 1x High pressure cleaning hose – 3.0 m with injector nozzle for drains
- 1x High pressure cleaning hose – 3.0 m with special cleaning nozzle
- Various adaptaters
- Various thicknesses





Compressed air pipe cleaners

Ideal for removing blockages in drains and pipes

Through pressure buildup in the working cylinder via the integrated hand pump and up to 4 bar short term pressure, blockages are forcefully abolished upon relaxation of the pressure pad.

Product coverage

- Clearing and re-making of drainage and sewage pipes (toilets, shower, bath, sinks and washbasins etc.)

Product key features

- Fast, environmentally friendly operation without chemicals
- Easy and safe handling due to pressure safety device
- Sturdy plastic housing
- Universal use through attachments in various sizes and shapes

Art.-No. 1500000006 EAN 4004625367339



Delivery

- 1x Compressed air tube cleaner
- 1x Toilet seat attachment (Ø: 20 cm)
- 1x Shower tray drain cover attachment (Ø: 11.3 cm)
- 2x Sink and basin flow attachments (Ø: 6.0 cm/5.0 cm)



RoPump

Suction pressure cleaner

Suction pressure hand pump with ball joint and suction cup | Optimally sealed with triple sealing lip

Product coverage

- Removal of blockages in the siphon and drain region (wash basins, sinks, urinals, showers and baths, etc.)

Product key features

- Easy to use
- Environment-friendly without chemicals
- Sturdy plastic housing
- Easy to clean

Art.-No. 71991 EAN 4004625719916



RoPü

Suction cup to dissolve blockages in the bathroom and kitchen

Maxi: Total length approximately 40 cm | Ø Bell approximately 15 cm

Midi: Total length approximately 32 cm | Ø Bell approximately 13 cm

Mini: Total length approximately 16 cm | Ø Bell approximately 12 cm

Product coverage

- Removal of blockages in siphon and drain pipes

Product key features

- Fits most toilets and other drains in the bathroom and kitchen (sink, washing up sink, urinals, showers and baths, etc.)

RoPü Maxi

Art.-No. 71920 EAN 4004625719206



RoPü Midi

Art.-No. 1500001739 EAN 4004625400678



RoPü Mini

Art.-No. 1500001444 EAN 4004625396421





Power cleaner

The drain cleaner spray frees stubborn blockages in seconds

With gas pressure clogging by hair, grease, soap residues and other residues can be solved immediately.

Product coverage

- Cleaning, clearing and re-making of siphon and drain pipes (wash basins, sinks, toilets, showers and bathtubs)

Product key features

- Multiple application through 200 ml print cartridge
- Safe Handling
- Without addition of caustic substances
- Reduction of unpleasant odours by fresh lemon scent

Contents: 200 ml

Art.-No. 70631 EAN 4004625706312



Power Cleaner Set

The drain cleaner spray with rubber adapter frees stubborn blockages in seconds

With gas pressure clogging by hair, grease, soap residues and other residues can be solved immediately.

Product coverage

- Cleaning, clearing and re-making of siphon and drain pipes (wash basins, sinks, toilets, showers and bathtubs)

Product key features

- Multiple application through 200 ml print cartridge
- Safe Handling
- Universally due to rubber adapter
- Without addition of caustic substances
- Reduction of unpleasant odours by fresh lemon scent

Contents: 200 ml

Art.-No. 70630 EAN 4004625706305



Delivery

- 1x Power Cleaner Drain Spray
- 1x Rubber adapter



Radiator air vent

For optimum venting of radiators

5 mm square | heat-resistant

Product key features

- Quick and clean thanks collecting receptacle

Art.-No. 1500001265 EAN 4004625392911



Heating For rapid heating, for example at construction sites, tents or outdoors, as well as a heat source at outdoor events during the cold season, we have specialised in a mobile, gas-powered heaters range with the appropriate accessories.

Our gas heaters can be operated with standard propane cylinders. The mobile heaters are provided for use with commercially available gas cartridges.

The heaters are characterised by simple and safe handling, they are compact, easy to transport and reliable in use. The optimised design of these devices is aligned with minimum gas consumption.

Our heaters are certified and they comply with currently prescribed standards and guidelines.





Eco gas heater

Tower heating units for propane gas bottles

Performance: min. 2.70 kW / max. 4.20 kW | Consumption: 0.2–0.37 kg/h | Suitable for propane gas bottles 5 kg and 11 kg

Product coverage

- For the heating of premises in weatherproof outdoor areas (tents, stalls and well-ventilated room)

Product key features

- Safety ignition
- Robust metal housing with protective grille
- Infinitely adjustable
- Secure connection by forced mounting on standard household gas cylinders
- Thermal fuse


Performance: 2.7–4.2 kW

Art.-No. 35984 EAN 4004625359846



Delivery

- 1x Gas heater
- 1x Mounting
- 1x Propane hose – 0.4 m (both sides G 1/4" L)
- 1x Propane constant regulator – 50 mbar

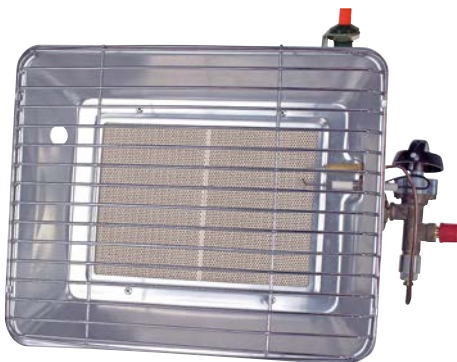

Eco piezo gas heater

Tower heating units for propane gas bottles

Performance: min. 2.70 kW / max. 4.2 kW | Consumption: 0.2–0.37 kg/h | Modell with piezo ignition | Suitable for propane gas bottles 5 kg and 11 kg

Product coverage

- For the heating of premises in weatherproof outdoor areas (tents, stalls and well-ventilated room)

Product key features

- Safety ignition
- Robust metal housing with protective grille
- Infinitely adjustable
- Secure connection by forced mounting on standard household gas cylinders
- Thermal fuse
- Piezo ignition

Performance: 2.7–4.2 kW

Art.-No. 35985 EAN 4004625359853



Delivery

- 1x Gas heater
- 1x Mounting
- 1x Propane hose – 0.4 m (both sides G 1/4" L)
- 1x Propane constant regulator – 50 mbar

01

02

03

04

05

06

07

08

09

10



RoTurbo 12000

Heat gun with Piezo ignition

Gas category – Gas type: I3B/P – Propane / Butane, I3P – Propane | Rated capacity: I3B/P: 13.3 kW, I3P: 11.9 kW | Gas consumption: 970 g/h | Operating pressure: 300 mbar | Mains voltage: 230 V~/50 Hz | Power Consumption: 39 W | Flame temperature: 930°C | Air emissions: 500 m³/h | Air temperature class: 32 K | Protection type: IPX4 | Motor: IP44 | Protection class: I

Product coverage

- For the heating of premises in weatherproof outdoor areas (tents, stalls and well-ventilated room)

Product key features

- Thermal fuse against overheating
- Double-walled housing made of stainless steel
- Standardised protection grid
- Big strong handle
- Safety ignition
- Constant pressure regulator with hose rupture protection
- Piezo ignition

Performance: 13.3 kW

Art.-No. 1500000050 EAN 4004625368848



Delivery

- 1x Gas heater
- 1x Propane hose – 1.0 m (both sides G 1/4" L)
- 1x Propane constant regulator – 300 mbar



RoTurbo 19000

Heat gun with Piezo ignition

Gas category – Gas type: I3B/P – Propane / Butane, I3P – Propane | Rated capacity: I3B/P: 18.2 kW, I3P: 16.0 kW | Gas consumption 1325 g/h | Operating pressure: 300 mbar | Mains voltage: 230 V~/50 Hz | Power Consumption: 39 W | Flame temperature: 980°C | Air emissions: 500 m³/h | Air temperature class: 48 K | Protection type: IPX4 | Motor: IP44 | Protection class: I

Product coverage

- For the heating of premises in weatherproof outdoor areas (tents, stalls and well-ventilated room)

Product key features

- Thermal fuse against overheating
- Double-walled housing made of stainless steel
- Standardised protection grid
- Big strong handle
- Safety ignition
- Constant pressure regulator with hose rupture protection
- Piezo ignition

Performance: 18.2 kW

Art.-No. 1500000051 EAN 4004625368855



Delivery

- 1x Gas heater
- 1x Propane hose – 1.0 m (both sides G 1/4" L)
- 1x Propane constant regulator – 300 mbar



RoTurbo 35000

Heat gun with Piezo ignition

Gas category – Gas type: I3B/P – Propane / Butane, I3P – Propane | Rated capacity: I3B/P: 34.0 kW, I3P: 29.0 kW | Gas consumption: 2460 g/h | Operating pressure: 1500 mbar | Mains voltage: 230 V~/50 Hz | Power Consumption: 65 W | Flame temperature: 1000°C | Air emissions: 800 m³/h | Air temperature class: 53 K | Protection type: IPX4 | Motor: IP44 | Protection class: I

Product coverage

- For the heating of premises in weatherproof outdoor areas (tents, stalls and well-ventilated room)

Product key features

- Thermal fuse against overheating
- Double-walled housing made of stainless steel
- Standardised protection grid
- Big strong handle
- Safety ignition
- Constant pressure regulator with hose rupture protection
- Piezo ignition

Performance: 34.0 kW

Art.-No. 1500000363 EAN 4004625377062



Delivery

- 1x Gas heater
- 1x Propane hose – 1.5 m (both sides G 3/8" L)
- 1x Propane constant regulator – 1500 mbar



RoTurbo 35000 SA

Infinitely adjustable heat gun with Piezo ignition

Gas category – Gas type: I3B/P – Propane / Butane, I3P – Propane | Rated capacity: I3B/P: 19.0–34.0 kW, I3P: 17.0–29.0 kW | Gas consumption: 1375–2460 g/h | Operating pressure: 1500 mbar | Mains voltage: 230 V~/50 Hz | Power Consumption: 65 W | Flame temperature: 1000°C | Air emissions: 800 m³/h | Air temperature class: 53 K | Protection type: IPX4 | Motor: IP44 | Protection class: I

Product coverage

- For the heating of premises in weatherproof outdoor areas (tents, stalls and well-ventilated room)

Product key features

- Thermal fuse against overheating
- Double-walled housing made of stainless steel
- Standardised protection grid
- Big strong handle
- Safety ignition
- Constant pressure regulator with hose rupture protection
- Piezo ignition
- Infinitely adjustable

Performance: 34.0 kW | adjustable

Art.-No. 1500000364 EAN 4004625377079



Delivery

- 1x Gas heater
- 1x Propane hose – 1.5 m (both sides G 3/8" L)
- 1x Propane constant regulator (1500 mbar) with hose rupture protection



RoTemp M 300

Portable gas heaters for all outdoor activities

For use with multi-gas 300, Multigas Jumbo and Topgas cartridges | Compact design with sturdy base with universal cartridge tray | Infinitely adjustable | High calorific value by heater with reflector

Product coverage

- For camping and other outdoor activities (hunting, fishing, nature observers etc.)

Product key features

- Economical combustion
- Mobile use
- Alignment of the water jet due to housing with reflector

Performance: 1800 W

Art.-No. 1500001066 EAN 4004625390696



RoTemp M 1000

Portable gas heater with catalyze technology and piezo ignition for all outdoor activities

For use with Multigas 300 Multigas Jumbo cartridge | Compact design with sturdy base and handle

Product coverage

- For camping and other outdoor activities (hunting, fishing, nature observers etc.)

Product key features

- Piezo ignition
- No open flame due to catalyze technology
- Quiet and economical combustion
- Mobile use
- Wind resistant

Performance: 1000 W

Art.-No. 1500000981 EAN 4004625389119



RoTemp M 2000

Portable gas heater with piezo ignition for all outdoor activities

For use with Multigas 300 | Compact, stable design and carrying handle | With cartridge compartment

Product coverage

- For camping and other outdoor activities (hunting, fishing, nature observers etc.)

Product key features

- Piezo ignition
- Low noise combustion
- Mobile use
- Wind resistant
- Stall protection
- Flame sensor / oxygen sensor
- Ceramic heating surface for high performance
- Handle and wall mounting
- Protection grid

Performance: 2000 W

Art.-No. 1500001067 EAN 4004625390702





Low pressure hose line

Pressure: 1 MPa (10 bar) | Ø 5 mm | Connection: 2x G 1/4" L |
 Certified according to EN 16436-1

Length: 0.4 m

Art.-No. 035914E EAN 4004625359143



Length: 0.8 m

Art.-No. 035915E EAN 4004625359150



Length: 1.5 m

Art.-No. 035916E EAN 4004625359167



Length: 3.0 m

Art.-No. 035917E EAN 4004625359174



01

02

03

04

05

06

07

08

09

10

Measure, test & inspect The new product family focuses on specific devices that are used to measure or determine various physical quantities and allow visual inspection of difficult to access objects.

The applications are very versatile. They range from distance measurements, temperature measurements, moisture detector measurements to optical video examination.

All units are of interest to both craftsmen and for the handyman. They are certified, reliable and extremely accurate as a result.



Building and wood moisture meters



Building and wood moisture meter

For fast and accurate moisture measurement of wood materials and building materials

Wood humidity measuring range: 6–44 % \pm 1 % | Recommended ambient temperature: 0°C to +40°C

Product coverage

- Measuring the residual moisture content of wood-based materials (eg timber.)
- Measuring the residual moisture content of building materials (eg masonry, concrete or screed.)

Product key features

- Results immediately read on the display
- LED for low-light locations
- Easy to use
- Protective cover for probe

Art.-No. 1500000797 EAN 4004625385579



Delivery

- 1x Building and wood moisture meter
- 4x AAA batteries

Distance measuring devices



RO laser meter

Distance meter for the determination of lengths, areas, volumes and distances
Integrated Pythagoras additional measurement function for other geometric calculations (for example, diagonals or the height of a facade)

Product coverage

- Calculation of surfaces
- Calculation of volumes
- Calculation of distances
- More geometric calculations using the indirect Pythagoras additional measurement function
- Squaring of buildings

Product key features

- Ease of use
- Measurement accuracy: \pm 1.5 mm (\pm 0.06 in)
- Minimum unit displayed: 1 mm
- Several units: Meter (m), Inch (in), Feet (ft.), Inch + Feet (" , ')

Coverage: 35 m

Art.-No. 1500000597 EAN 4004625382639



Delivery

- 1x Distance meter
- 2x LR03 / AAA – 1.5 V
- 1x Mini screwdriver
- 1x Nylon pouch
- 1x Hand Strap

Coverage: 50 m

Art.-No. 1500000598 EAN 4004625382653



Delivery

- 1x Distance meter
- 2x LR03 / AAA – 1.5 V
- 1x Mini screwdriver
- 1x Nylon pouch
- 1x Hand Strap



Endoscope camera TF 2809

For the exploration of inaccessible places

2.4"-LCD-Screen 480 x 234 Pixel (Colour) | Ø Camera head approximately 10 mm | Gooseneck length: Approximately 0.90 m | Video format: PAL

Product coverage

- Visual inspection of hard to reach places
- Inspection work in the automotive, building trade, industrial equipment, household (example: Chimneys or ventilation pipes)

Product key features

- Video output for further image transmission
- Flexible, waterproof gooseneck
- Camera head (waterproof) with LED lighting (dimnable)

Includes 2.4 LCD – Gooseneck ca. 0.90 m

Art.-No. 69107 EAN 4004625691076



Delivery

- 1x Endoscope camera
- 1x Double hook attachment
- 1x Hook attachment
- 1x Magnetic attachment
- 1x Mirror attachments
- 1x Video cable
- 4x AA batteries



Endoscope camera TF 3006X

For the exploration of inaccessible places

2.4"-LCD-Screen 480 x 234 Pixel (Colour) | Ø Camera head approximately 10 mm | Gooseneck length: approximately 1.80 m | Video format: PAL

Product coverage

- Visual inspection of hard to reach places
- Inspection work in the automotive, building trade, industrial equipment, household (example: Chimneys or ventilation pipes)

Product key features

- Video output for further image transmission
- Flexible, waterproof gooseneck
- Camera head (waterproof) with LED lighting (dimnable)

Includes 2,4" LCD – Gooseneck ca. 1.80 m

Art.-No. 1500000059 EAN 4004625368923



Delivery

- 1x Endoscope camera
- 1x Waterproof, flexible gooseneck with about 1.80 m in length
- 1x Double hook attachment
- 1x Hook attachment
- 1x Magnetic attachment
- 1x Mirror attachments
- 4x AA batteries
- 1x Plastic case
- 1x USB cable
- 1x Video Connection Cable



Endoscope camera TF 3006SX

For the exploration of inaccessible places

2.4"-LCD-Screen 480 x 234 Pixel (Colour) | Ø Camera head approximately 10 mm | Gooseneck length: approximately 1.80 m | Video format: NTSC / PAL | SD-Card-Slot: microSD max. 32 GB | Video and photo resolution: 720 x 480 (in colour)

Product coverage

- Visual inspection of hard to reach places
- Inspection work in the automotive, building trade, industrial equipment, household (example: Chimneys or ventilation pipes)

Product key features

- Video output for further image transmission
- Flexible, waterproof gooseneck
- Camera head (waterproof) with LED lighting (dimnable)

Includes 2,4" LCD – Gooseneck ca. 1.80 m

Art.-No. 1500000060 EAN 4004625368930



Delivery

- 1x Endoscope camera
- 1x Waterproof, flexible gooseneck with about 1.80 m in length
- 1x Double hook attachment
- 1x Hook attachment
- 1x Magnetic attachment
- 1x Mirror attachments
- 4x AA batteries
- 1x Plastic case
- 1x USB cable
- 1x Video Connection Cable



Endoscope camera TF3006 BMX

For the exploration of inaccessible places

3,5"-LCD-Screen 320 x 240 Pixel (in colour) | Ø Camera head ca. 10 mm | Gooseneck length: ca. 1.80 m | Video format: NTSC / PAL | SD-Card-Slot: microSD max. 32 GB | Video and photo resolution: 640 x 480 (in colour)

Product coverage


- Visual inspection of hard to reach places
- Inspection work in the automotive, building trade, industrial equipment, household (example: Chimneys or ventilation pipes)

Product key features

- Video output for further image transmission
- Flexible, waterproof gooseneck
- Camera head (waterproof) with LED lighting (dimnable)

Includes 3.5" LCD – Gooseneck ca. 1.80 m

Art.-No. 1500001391 EAN 4004625396179



Delivery

- 1x Endoscope camera
- 1x Waterproof, flexible gooseneck with about 1.80 m in length
- 1x Double hook attachment
- 1x Hook attachment
- 1x Magnetic attachment
- 1x Mirror attachments
- 4x AA batteries
- 1x Plastic case
- 1x USB cable
- 1x Video Connection Cable



RO Detector

Digital detection device

Maximum detection depth: Ferrous metals → 80 mm | Nonferrous metals: 60 mm | Live cables: 50 mm | Wood: 20 mm

Product coverage

- Locations of ferrous and nonferrous metals
- Locations of conductive lines
- Locations of wooden structures

Product key features

- Minimises the risk of drilling through water or power lines or armouring irons
- Accurate, reliable and easy to use

Art.-No. 1500001135 EAN 4004625390955



Delivery

- 1x Locating device
- 1x Storage bag
- 1x 9 V block battery



Digital multi meter

Simple measurements of various electrical quantities

Ideal for electronics hobbyists and crafters

Product coverage

- Measurement of direct and alternating current voltages
- Measurement of current intensities
- Measurement of resistors

Product key features

- Automatic measuring range detection
- Contactless AC current sensor
- LED work light

Includes LED working light

Art.-No. 1500000806 EAN 4004625385654



Delivery

- 1x Digital Multimeter including LED work light
- 2x AAA batteries

Temperature measuring devices



Economy infrared thermometer

Digital temperature measuring device

Accuracy $\pm 2^{\circ}\text{C}$ or 2 %

Product coverage

- Non-contact measurement of surface temperature in most organic materials
- Measurement of painted and oxidised surfaces

Measuring range: -30°C up to $+380^{\circ}\text{C}$

Art.-No. 1500000804 EAN 4004625385630



Delivery

- 1x Economy digital infra red thermometer
- 1x Storage bag
- 1x 9 V Block battery



Professional infrared thermometer

Digital temperature measuring device

Measuring accuracy $\pm 2^{\circ}\text{C}$

Product coverage

- Non-contact measurement of surface temperature in most organic materials
- Measurement of painted and oxidised surfaces

Product key features

- Audible alarm in cases of temperature over- and temperature undershoot
- Temperature limits freely adjustable


Measuring range: $-50^{\circ}\text{C}-800^{\circ}\text{C}$

Art.-No. 1500000805 EAN 4004625385647



Delivery

- 1x Professional infra red thermometer
- 1x Storage bag
- 1x 9 V Block battery

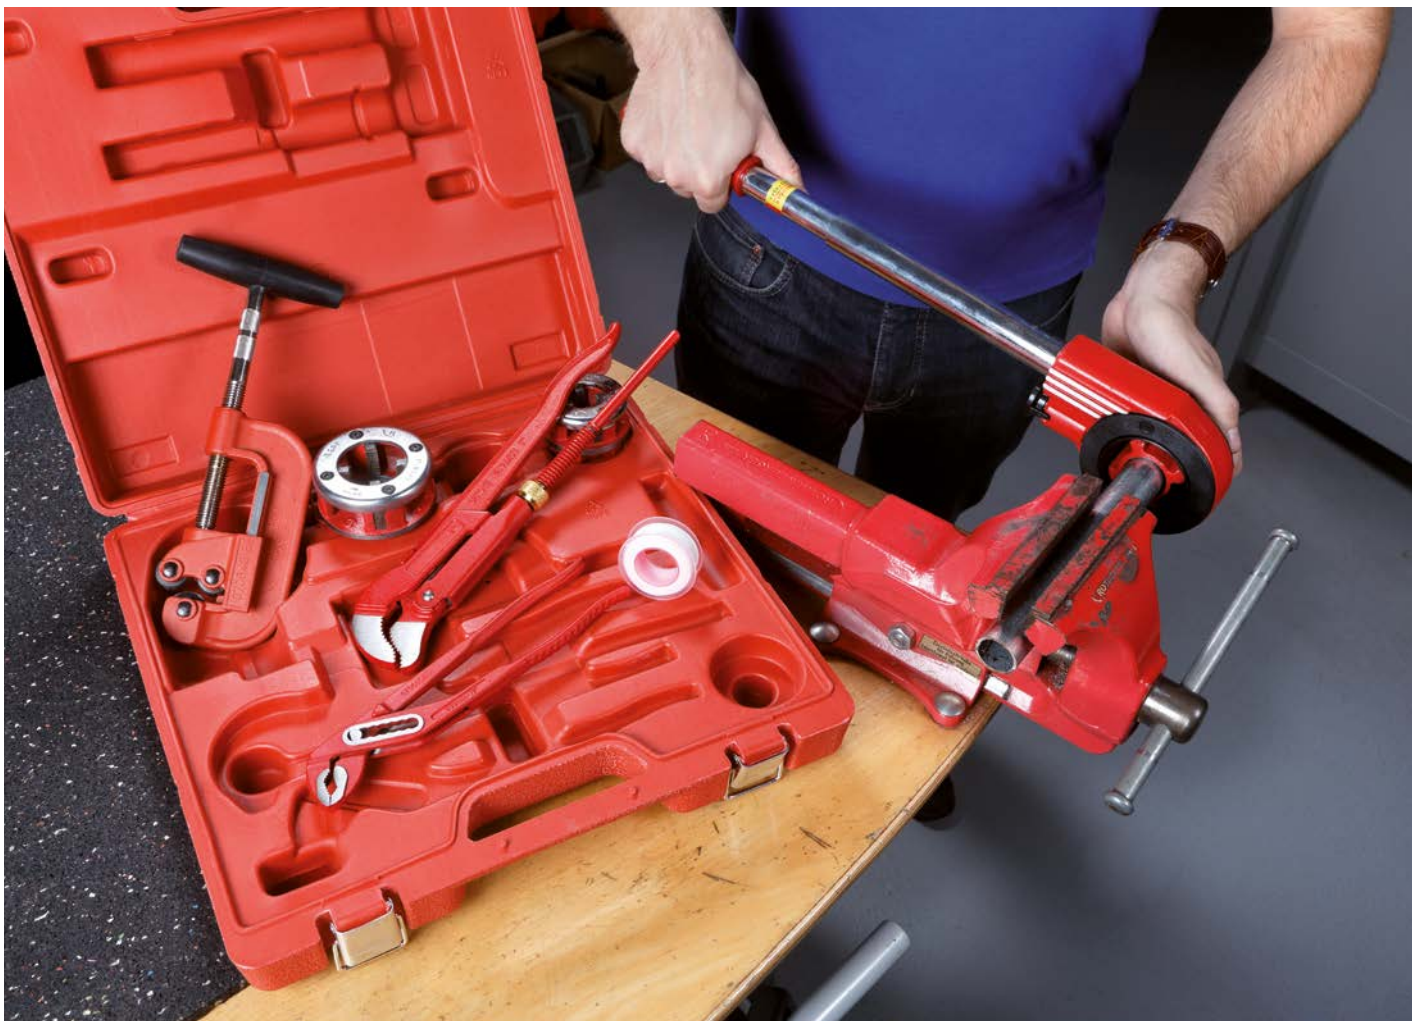

Shears



Shape cutting shears

Handy, small and agile

Cutting performance: up to 1.8 mm | Stainless steel sheet: up to 1.2 mm

Product coverage

- Cutting of sheets

Product key features

- Angled cutting head ensures safe distance from the cut
- Serrated hardened blades for clean, burr-free cuts
- With leverage for optimum power transmission

Left hand cutting

Art.-No. 36161 EAN 4004625361610



Shape cutting shears

Handy, small and agile

Cutting performance: up to 1.8 mm | Stainless steel sheet: up to 1.2 mm

Product coverage

- Cutting of sheets

Product key features

- Angled cutting head ensures safe distance from the cut
- Serrated hardened blades for clean, burr-free cuts
- With leverage for optimum power transmission

Right hand cutting

Art.-No. 36162 EAN 4004625361627



Ideal shears

Handy, small and agile

Cutting performance: up to 1.8 mm | Stainless steel sheet: up to 1.2 mm

Product coverage

- Cutting of sheets

Product key features

- Angled cutting head ensures safe distance from the interface
- Hardened blades with micro-toothing for clean, burr-free cuts
- With leverage for optimum power transmission

Right and straight cutting

Art.-No. 36163 EAN 4004625361634





Combination pliers

The professional tool with high cutting performance and strong clamping force
Maximum leverage by staggered joint axis

Product key features

- With 2-component handle protection

6" – Length: ca. 16 cm

Art.-No. 36121 EAN 4004625361214



7" – Length: ca. 18 cm

Art.-No. 36122 EAN 4004625361221



8" – Length: ca. 20 cm

Art.-No. 36123 EAN 4004625361238



Telephone pliers

The professional tool with high cutting performance and strong clamping force
Maximum leverage by staggered joint axis | Flat-oval tapered jaw with cutting edges for hard and soft wire

Product key features

- With 2-component handle protection

6" – Length: ca. 16 cm

Art.-No. 36131 EAN 4004625361313



8" – Length: ca. 20 cm

Art.-No. 36132 EAN 4004625361320



Side cutter

The professional tool with high cutting performance and strong clamping force
Maximum leverage by staggered joint axis | For hard and soft wire

Product key features

- With 2-component handle protection

6" – Length: ca. 16 cm

Art.-No. 36141 EAN 4004625361412





Wire strippers

The professional tool with high cutting performance and strong clamping force
Maximum leverage by staggered joint axis | For hard and soft wire

Product key features

- With 2-component handle protection

6" – Length: ca. 16 cm

Art.-No. 36142 EAN 4004625361429



End cutting pliers

The professional tool with high cutting performance and strong clamping force
Maximum leverage by staggered joint axis | Cutting edges induction hardened | CrV-steel

Product key features

- Plastic-coated handles

7" – Length: ca. 18 cm

Art.-No. 36143 EAN 4004625361436



Rabitz pliers

The professional tool with high cutting performance and strong clamping force
Maximum leverage by staggered joint axis | Cutting edges induction hardened | CrV-steel | Long sides for maximum leverage

Product key features

- Plastic-coated handles

10" – Length: ca. 25 cm

Art.-No. 36151 EAN 4004625361511





Rigid foam hand cutter

Fast and easy cutting of rigid foam panels

Power Consumption: 190 W | Nominal voltage: 230 V~/50 Hz | Heating time: approximately 15 s | Max. Temperature: approximately 315°C | Protection class: IPX0

Product coverage

- Accurate and time-saving cutting of polystyrene foam

Product key features

- Fully electronically controlled
- Fast heating time
- Temperature continuously adjustable
- Continuous incision without stopping

Performance: 190 W

Art.-No. 1500000062 EAN 4004625368954



Delivery

- 1x Sturdy plastic case
- 1x Cutter – 10 cm
- 1x Cleaning brush
- 1x Tray stand
- 1x VDE cable – about 3 m

Optional accessories

Cutting knife – 10 cm

Art.-No. 1500000063 EAN 4004625368961



Cutting knife – 15 cm

Art.-No. 1500000064 EAN 4004625368978



Cutting knife – 20 cm

Art.-No. 1500000065 EAN 4004625368985



Flat cutting knife – 30 cm

Art.-No. 1500000066 EAN 4004625368992



Cutting table – 15 cm

Art.-No. 1500000067 EAN 4004625369005



Groove cutting adapter for pipes

Art.-No. 1500000068 EAN 4004625369012



Cutting knife for pipes up to Ø 20 mm

Art.-No. 1500000069 EAN 4004625369029



Cutting knife for pipes up to Ø 27 mm

Art.-No. 1500000070 EAN 4004625369036



Cutting knife for pipes up to Ø 34 mm

Art.-No. 1500000071 EAN 4004625369043



Cutting knife holder N. 22

Art.-No. 1500000072 EAN 4004625369050





POS

All ROTHENBERGER Industrial individual stocked products are sold in closed transparent packaging. The colour design promotes the attention of customers, the shaped insert contains the product instructions and the transparent packaging support advises on the purchasing decision and helps to promote customer satisfaction.

High quality packaging means that sale walls remain better looking and easy to maintain over a long period of time. The standard size of the packaging makes it very easy to achieve and maintain a wide range of products and replacement of parts.

Making the most of the sales walls with our dealers is the basis of our software-based product line presentation. Distributors and customers benefit from a single, demand-oriented range structure as a supporting element for the consultation and the purchase decision of the customer. With our software-based module design we are shortly going to be able to respond to all the needs of our distributors and to actively support them with an optimised display of ROTHENBERGER Industrial products on sale walls.

Optimally designed, flashy sales displays in colour made from environmentally friendly materials support the supplementary and promotional business of our dealers. The displays can be used universally and can be equipped as needed for multiple applications in the market. Provided with explanatory pictograms, the high quality top signs convey the buying behaviour and have a positive effect on the buying of the products.





Sales wall **Soldering | Welding | Protective gas**



Sales wall **Sanitary**

Alphabetical Index

15 plus gas nozzle	41	Electric weedkiller	63	M	
45° corner pipe wrench	72	Electrode holder	40	M8 gas nozzle	40
90° fitting pliers	72	Electronic soldering station	12	Mapp Gas	51
A		End cutting pliers	96	Maxigas 400	50
Airprop 2000	19	Endoscope camera TF 2809	90	Micro burner and welding nozzle assortment	42
Angle magnet	42	Endoscope camera TF3006 BMX	91	Micropen Set 1300	14
Arc Welders'	34	Endoscope camera TF 3006SX	91	Mini gas lighter	64
Argon	52	Endoscope camera TF 3006X	90	MiniBend	75
Automatic welding protective head shield	46	F		MiniCut	68
B		Fittings paste solder	22	Minigas 100	50
Balloon Party Set	61	Flame retardant mat	42	MiniMax	68
Basin wrench	71	Flaming devices	55	Mixing nozzle key	76
Bench cooker	62	Flux	22	Multigas 300	49
Brand	13	Flux paste	23	Multigas Jumbo	49
Brazing rings CU	25	Fuel gas	49	O	
Brazing torches	18	Full protection eyewear	45	Oxygen (O ₂) reusable bottle	53
Building and wood moisture meter	89	G		Oxygen (O ₂) single use bottle	53
Bunsen burner	61	Gas regulating valve	26	Oxygen pressure reducer	44
C		Gas welding torches	29	P	
C200 Supergas	49	Gooseneck gas lighter	64	Pipe cleaning	78
Carbon dioxide (CO ₂)	52	GratFix	75	Pipe cleaning cables with claw	79
Chipping hammer	47	Guttering soldering set	16	Pipe-perfect	79
Cleaning spiral with curved tip	78	H		Pipe vice	69
Cleaning spiral with return drill	78	Hard soldering paste	23	Plastic cutting shears	73
Combination pliers	95	Heaters	83	Plastic pipe cutters	73
Compressed air pipe cleaners	80	Helium	52	Plastic Welders'	36
Contact tip	41	Hemp dispenser	76	Pliers	95
Copper pipe flexible spring	76	Hose package Roxy 400L / Roxy Universal	45	Pocket Torch Piezo	15
Copper pipe inner brush	71	Hose package Roxy Kit / Roxy Mapp	44	Point gas nozzle	41
Copper pipe outer brush	71	Hot Pack burner	25	Power cleaner	81
Copper soldering iron	26	Hot Pack set	15	Power Cleaner Set	81
Crème Brûlée Set	61	Hot Pen Piezo Set	14	Power Mapp	18
D		I		Premium plastic pipe shears	73
Devices	61	Ideal shears	94	Prescription glass	47
Digital multi meter	92	Incandescent mantle	65	Pressure reducer	44
Distance measuring devices	89	Industrial oxygen	53	Pressure reducer with 2 manometers	44
Double nipple	59	Inspection devices	90	Professional infrared thermometer	93
Duo camping cooker	62	Internal and external milling cutter	71	Professional soldering iron set	12
E		L		Propane constant regulator	58, 65
Earth terminal	40	LED economy head lamp	63	Propane gas hose line	59
Eco gas heater	83	LED multi function light	63	Propane gas leak protection	58
Eco piezo gas heater	83	LED premium head lamp	63	Propane handle	26
Economy infrared thermometer	92	Lighters	64	Propane refill connection	59
Economy plastic pipe shears	73	Low pressure hose line	87	Propane regulator	58
				Propane regulator with manometer	58

Propane small bottle	51	RoVlies	25	Thread cutting head	69
Propane soldering set 1800	19	RoWeldo 160	34	Three gas system AMS RE17 10/10	33
Protective gas nozzle cleaner	43	RoWin 80	35	Tiffany craft set	24
Protective gas	52	RoWin 140	35	Topgas 220	50
Protective glass	47	RoWin 160	36	Tube Cutter 30	67
Protective gloves	47	RoWin 160 Plus	36	Tube Cutter 35	67
		Roxy 400L	31	Tube Cutter 42	68
		Roxy Kit Plus	29	Tube machining	67
		Roxy Mapp	30	Turbo Plus	57
		Roxy Universal	32	Turbo soldering set 2000	19
R		S		U	
Rabitz pliers	96	Safety top lighter	43	Universal burner	57
Radiator air vent	81	Salmiak stone	25	Universal spud wrench	75
Radio electronic set	24	SaniFresh	77		
Replugging ratchet	74	SaniGrip	75	W	
Rigid foam hand cutter	97	Sanikit	67	Water pump pliers	72
RO Detector	92	Scout camping cooker	62	Water tap reseating tool	74
RO laser meter	89	Scout camping lamp	62	Welding and brazing powder	23
RoCored Welder 90	34	Scout replacement glass	65	Welding protection goggles	45
RoCored Welder 180 Combi	34	Screw hole	74	Welding protection spray	47
RoCut plastic pipe shears	74	Screw ring goggles	45	Wire brush	42
RoFill Super 100	50	Shape cutting shears	94	Wire strippers	96
RoFire 1800	18	Shears	94		
RoFire Mini 1450	16	Side cutter	95	Z	
RoFire Piezo 1950	18	Sliding sleeves kit	75	Zinc soldering fluid	22
RoFix Set 1800	15	Socket welder CR-RJQ-40	36		
RoFlame Economy Set	17	Socket welder CR-RJQ-63	37		
RoFlame Premium	16	Socket welder CR-ZRJQ-63T	37		
RoFlame Premium Piezo	17	Socket welder CR-ZRJQ-110T	37		
RoFlame Premium Set	17	Soft solder flux	22		
RoJet Premium	79	Soft solder set	24		
RoLokus toilet seat assembly wrench	76	Solder flux	23		
RoMaxi Economy	56	Soldering fluid	22		
RoMaxi Premium	55	Soldering iron	11		
RoMaxi Premium Piezo	55	Soldering iron set	12		
RoMini Premium	56	Soldering torches	11		
Ronol Syn	77	Special tools	97		
RoPen 1300	13	Standard gas lighter	64		
RoProtect protective clear vision shield	46	Steel pipe cutter	68		
RoProtect protective hand shield	46	Storm safe gas lighter	64		
RoProtect protective head shield	46	SuperCut caliper ratchet	69		
RoPü	80	SuperCut Premium	70		
RoPump	80	SuperCut Set	70		
RoQuick	13				
RoTemp M 300	86	T			
RoTemp M 1000	86	Teflon band	76		
RoTemp M 2000	86	Telephone pliers	95		
RoTest leak detection spray	77	Temperature measuring devices	92		
RoTurbo 12000	84				
RoTurbo 19000	84				
RoTurbo 35000	85				
RoTurbo 35000 SA	85				

Numerical Index

0

011080E	71	035992E	64	070757E	69	35201	50
021659E	75	036040E	76	070758E	69	35206	52
021832E	74	040512E	25	070759E	69	35420	42
021835E	74	040514E	25	070780X	70	35498	16
025160E	75	040516E	25	070941E	67	35499	26
025162E	76	040518E	25	072980E	78	35501	18
025163E	76	045225E	22	072981E	78	35503	16
025165E	76	045226E	22	072982E	78	35504	50
027180E	74	045253, 045253E	20	072984E	78	35510	49
030813E	18	045255, 045255E	20	072985E	78	35513	15
030910E	26	045256, 045256E	20	072986E	78	35555	18
030925E	58	045260, 045260E	20	072990E	79	35570	50
030927E	59	045261, 045261E	20	073298E	75	35600	20
030950E	19	045262, 045262E	20			35601	20
030954E	55	045263E	20	1		35602	20
030955E	55	045266E	22	18078	15	35603	20
030957E	55	045267E	25			35604	20
030958E	56	045270, 045270E	20	3		35605	20
030961E	56	045271, 045271E	20	30801	19	35606	20
031051E	42	045272, 045272E	20	30900	19	35607	20
032081E	58	045280, 045280E	20	30966	57	35608	20
032082E	58	045281, 045281E	20	30991	13	35609	20
032093E	43	045282, 045282E	20	31221	38	35634	44
032100E	58	055090E	74	31222	38	35635	53
032201E	59	055091E	74	31223	38	35702	38
032207E	59	070615E	76	31224	38	35704	38
033310E	59	070623E	76	31225	38	35707	20
035126E	61	070624E	76	31226	38	35708	38
035206E	61	070640E	68	31231	38	35709	38
035510D	49	070641E	67	31232	38	35710	38
035551-A	51	070642E	68	31233	38	35711	38
035570-B	50	070643E	68	31234	38	35730	38
035610E	23	070644E	68	31235	38	35740	29
035611E	23	070650E	72	31236	38	35741	53
035621E	45	070651E	72	31239	38	35760	30
035718E	23	070652E	72	31240	38	35775	52
035719E	22	070656E	72	31243	38	35776	52
035723E	26	070657E	72	31244	38	35780	31
035908E	65	070658E	72	31251	20	35798	33
035910E	25	070659E	72	31252	20	35803	20
035914E	87	070662E	75	32355	25	35807	20
035915E	87	070663E	74	33079	51	35809	20
035916E	87	070664E	69	33300	44	35817	20
035917E	87	070669E	70	33301	45	35818	20
035921E	65	070673E	67	35050	32	35840	50
035925E	58	070674E	69	35060	12	35902	62
035990E	64	070676E	71	35115	13	35904	62
035991E	64	070755E	69	35120	14	35907	65
		070756E	69	35130	15	35930	16

35931	17	530206	47	854191	71	1500000804	92
35940	62	530207	45	854193	71	1500000805	93
35951	11	530208	45	854195	71	1500000806	92
35952	11	530209	40	854196	71	1500000891	63
35953	11	530210	40	85800	77	1500000924	49
35954	11	530211	40			1500000930	56
35957	13	530212	40	1000		1500000981	86
35959	11	530213	42	1000000189	57	1500001066	86
35960	12	530214	42	1000000242	22	1500001067	86
35984	83	530215	47	1000000557	57	1500001135	92
35985	83	530216	47	1000000981	17	1500001265	81
36010	73	530217	44	1000000982	17	1500001391	91
36011	73	530218	44	1000000984	49	1500001392	62
36012	73	530219	43	1000000985	17	1500001444	80
36015	34	530220	40	1000001250	57	1500001450	63
36051	36	530221	40			1500001451	63
36052	37	530222	41	1500		1500001739	80
36060	14	530223	41	1500000006	80	1500002183	63
36062	37	530224	41	1500000023	64	1500002184	35
36063	37	530226	40	1500000041	12	1500002185	35
36099	73	530227	41	1500000045	49	1500002186	36
36121	95	530230	41	1500000050	84	1500002187	34
36122	95	530231	41	1500000051	84	1500002189	36
36123	95	530232	41	1500000059	90	1500002197	75
36131	95	530233	41	1500000060	91		
36132	95	530234	41	1500000062	97		
36141	95	540251E	59	1500000063	97		
36142	96	540255E	59	1500000064	97		
36143	96	55099	73	1500000065	97		
36151	96	561351E	42	1500000066	97		
36161	94	561352E	42	1500000067	97		
36162	94			1500000068	97		
36163	94			1500000069	97		
		6		1500000070	97		
		65000	77	1500000071	97		
		65013	77	1500000072	97		
		69107	90	1500000139	79		
		7		1500000140	79		
		70630	81	1500000141	79		
		70631	81	1500000171	46		
		70940	79	1500000194	61		
		71920	80	1500000363	85		
		71991	80	1500000364	85		
		8		1500000465	44		
		854181	71	1500000542	34		
		854183	71	1500000544	11		
		854185	71	1500000597	89		
		854186	71	1500000598	89		
				1500000797	89		
4							
40450	23						
40600	47						
45120	24						
45150	24						
45227	24						
45264	22						
5							
520854E	25						
530201	46						
530202	46						
530203	46						
530204	47						
530205	47						



Social Responsibility

We feel an obligation not only to corporate responsibility, but also to the well-being of people and the environment. To this, we devote resources, initiative, commitment and, last but not least, money.

Environmental Commitment

At Rothenberger, environmentally responsible business is a given. Therefore the company holds to the strictest environmental standards and is committed to responsible use of resources and energy.

Accepting Social Responsibility

Corporate social responsibility is more than just a nice phrase for us – it's a binding promise. Rothenberger accepts its social responsibility and regularly supports many projects and events for the common good. All German apprentices and trainees undergo, as part of their educational program, a social responsibility week involving care for the elderly, the sick or the disabled. The goal is to convey more to young people than just instructional material and knowledge. It is a conscious contribution to developing social competency among young employees.

TOOLS FOR LIFE Foundation

In 2008, Dr. Helmut Rothenberger founded the Tools for Life Foundation, which is committed to the sustainable common good of our society. The goal of Tools for Life is to help people on site, around the world, by establishing and improving drinking water and energy supplies. This is because potable water and a functional energy supply are still not common in many parts of the world. In the spirit of helping people to help themselves, Tools for Life inspires people to take their future into their own hands. Rothenberger is a committed partner, supporting the foundation with products and employee expertise to provide valuable assistance. Furthermore, Tools for Life collaborates with renowned international aid organizations.

Disclaimer

Due to continual technical development and modification of our products in line with customer requirements we reserve the right to alter the appearance, scope of delivery, performance data, features, dimensions and weights of our products without notice and without liability. We will not be held liable for modification to previously delivered products. We also reserve the right to remove products from our range. This catalogue replaces all previous editions. Declarations of technical standards are non-binding. Work instructions; and tips on product usage and safety; are non-binding and are in no way intended to replace legal norms or other regulations issued by professional organisations or statutory accident insurance funds in the respective country of use. No part of this catalogue may be reproduced, converted into a machine-readable format; or stored or processed in an electronic system by means of reprint, photocopy, microfilm or by any other method without the prior written permission of ROTHENBERGER Industrial GmbH. Modifications and additions to this catalogue are not permitted. All rights reserved for all jurisdictions.